

# **FS Series Heads**

## **Swing to Tree Disc Saw Heads**

S/N WCFS20X003001 –

S/N WCFS22X002001 –

S/N WCFS24X004001 –

### **TECHNICAL MANUAL**

#### **FS Series Disc Saw Heads**

#### **TMF382053 (JULY01)**

#### **CALIFORNIA Proposition 65 Warning**

**Diesel engine exhaust and some of its constituents  
are known to the State of California to cause cancer,  
birth defects and other reproductive harm.**




#### **WARNING**

**The engine exhaust from this product contains  
chemicals known to the State of California to cause  
cancer, birth defects or other reproductive harm.**

**Worldwide Construction and Forestry Division**

**English**

# Workshop Manual

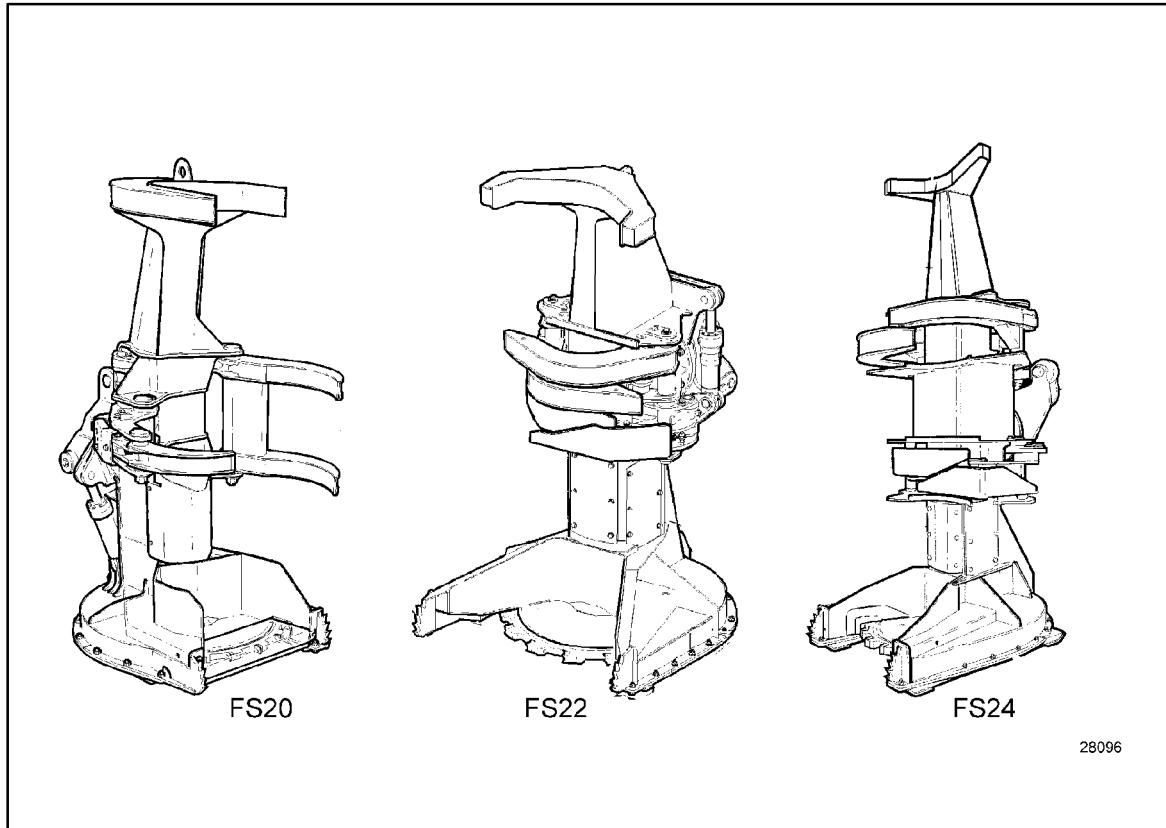

28096

## Swing to Tree Disc Saw Felling Heads

Timberjack Inc.  
P.O. Box 160  
925 Devonshire Avenue  
Woodstock, Ontario, Canada  
N4S 7X1

Telephone: (519) 537-6271

# Table of Contents

---

| <b>Section</b> | <b>Description</b>  |
|----------------|---------------------|
| 7400           | Introduction        |
| 7411           | Felling Head Frame  |
| 7412           | Clamp Arms          |
| 7420           | Wrist/Boom Adapter  |
| 7430           | Disc Saw Group      |
| 7434           | Disc Saw Driveshaft |
| 7440           | Hydraulic Group     |
| 7441           | Hydraulic Motors    |
| 7442           | Hydraulic Cylinders |
| 7450           | Electrical Group    |

# 7400 Introduction

|  |         |
|--|---------|
| <u>1.1 Introduction</u>                      | 7400-3  |
| <u>1.1.1 General</u>                         | 7400-3  |
| <u>1.1.2 Models Covered By This Manual</u>   | 7400-3  |
| <u>1.2 FS20 (Swing to Tree)</u>              | 7400-4  |
| <u>1.2.1 Component Description</u>           | 7400-4  |
| <u>1.2.2 General Dimensions</u>              | 7400-5  |
| <u>1.2.3 General Specifications</u>          | 7400-6  |
| <u>1.3 FS22 (Swing to Tree)</u>              | 7400-7  |
| <u>1.3.1 Component Description</u>           | 7400-7  |
| <u>1.3.2 General Dimensions</u>              | 7400-8  |
| <u>1.3.3 General Specifications</u>          | 7400-9  |
| <u>1.4 FS24 (Swing to Tree)</u>              | 7400-10 |
| <u>1.4.1 Component Description</u>           | 7400-10 |
| <u>1.4.2 General Dimensions</u>              | 7400-11 |
| <u>1.4.3 General Specifications</u>          | 7400-12 |
| <u>1.5 Torque Values</u>                     | 7400-13 |
| <u>1.5.1 Steel Fasteners</u>                 | 7400-13 |
| <u>1.5.2 Hydraulic Fittings</u>              | 7400-16 |
| <u>1.6 Application of Adhesives</u>          | 7400-20 |
| <u>1.6.1 Through Hole (Bolts &amp; Nuts)</u> | 7400-20 |
| <u>1.6.2 Blind Holes (Cap Screws, etc.)</u>  | 7400-20 |
| <u>1.6.3 Pre-Assembled Fasteners</u>         | 7400-21 |
| <u>1.6.4 Hydraulic Fittings</u>              | 7400-21 |
| <u>1.7 Tool Lists</u>                        | 7400-22 |
| <u>1.7.1 Service Shop</u>                    | 7400-22 |
| <u>1.7.2 Service Truck</u>                   | 7400-23 |
| <u>1.7.3 Felling Head Service Tools</u>      | 7400-24 |

---

## **1.1 Introduction**

### **1.1.1 General**

The Workshop Manual is intended to provide technical information, component specifications, troubleshooting and removal, disassembly and reassembly procedures for most of the major components of the felling head. Use this manual in conjunction with the applicable Operator/Maintenance Manual and the applicable Carrier Workshop Manuals.

When practical, the Workshop Manual lists likely causes of malfunctions, offers test procedures to verify causes and then illustrates the steps for the adjustment or repair procedure(s).

Troubleshooting must always be a multi-step process. Use the following steps:

1. Know the operation of all machine systems.
2. Ask the operator about symptoms and when they occur.
3. Operate the machine yourself if practical.
4. List all possible causes.
5. Inspect for obvious causes.
6. Eliminate the simple ones by checking oil, changing filters, etc.
7. Carry out diagnostic procedures like pressure and leakage testing to pinpoint the cause.

Component specifications provide performance and mode of operation information that can be very useful in troubleshooting.

Disassembly and reassembly procedures are given for many major components. When possible, clearance and torques are given. If a manufacturer's workshop manual is available, it should be given priority.

Reference to special equipment for testing and repair is limited, as most repair shops or local machine shops are well equipped to fabricate on an as-needed basis to reduce downtime.

### **1.1.2 Models Covered By This Manual**


Technical information, component specifications, troubleshooting, removal, disassembly and reassembly procedures for the following model felling heads are covered in this manual:

- |                         |                         |
|-------------------------|-------------------------|
| 1. FS20 (Swing to Tree) | 3. FS24 (Swing to Tree) |
| 2. FS22 (Swing to Tree) |                         |

## **1.2 FS20 (Swing to Tree)**

### **1.2.1 Component Description**


- |  |   |
|--|---|
| 1. L.H. (Harvesting) Clamp Arms - 7412 | 6. R.H. (Accumulating) Clamp Arm - 7412 |
| 2. Log Rollers - 7411                  | 7. Lower Guards/Skis - 7411             |
| 3. Saw Blade Guard - 7411              | 8. Chip Deflector - 7411                |
| 4. Disc Saw Blade - 7430               | 9. Wrist Cylinder - 7440                |
| 5. Saw Drive Hydraulic Motor - 7440    | 10. Wrist - 7420                        |

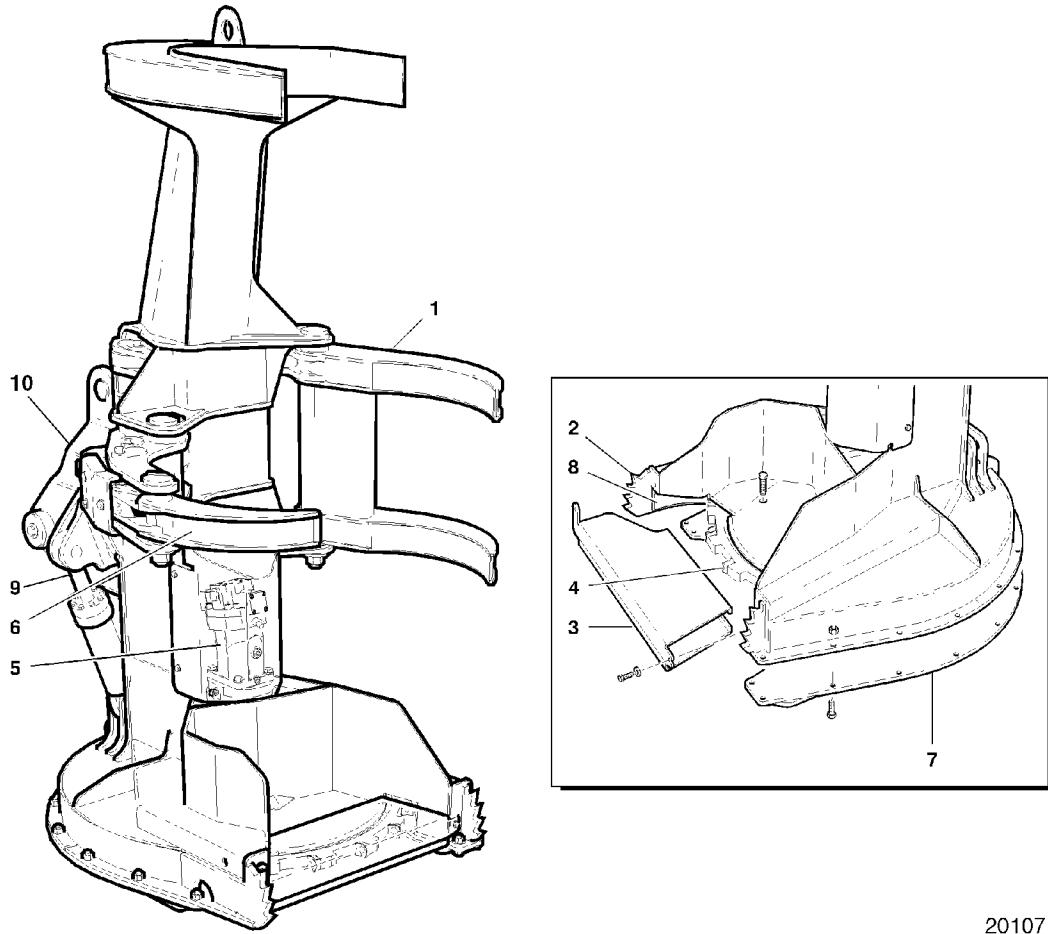

20107

## **1.2 FS20 (Swing to Tree)**

### **1.2.2 General Dimensions**

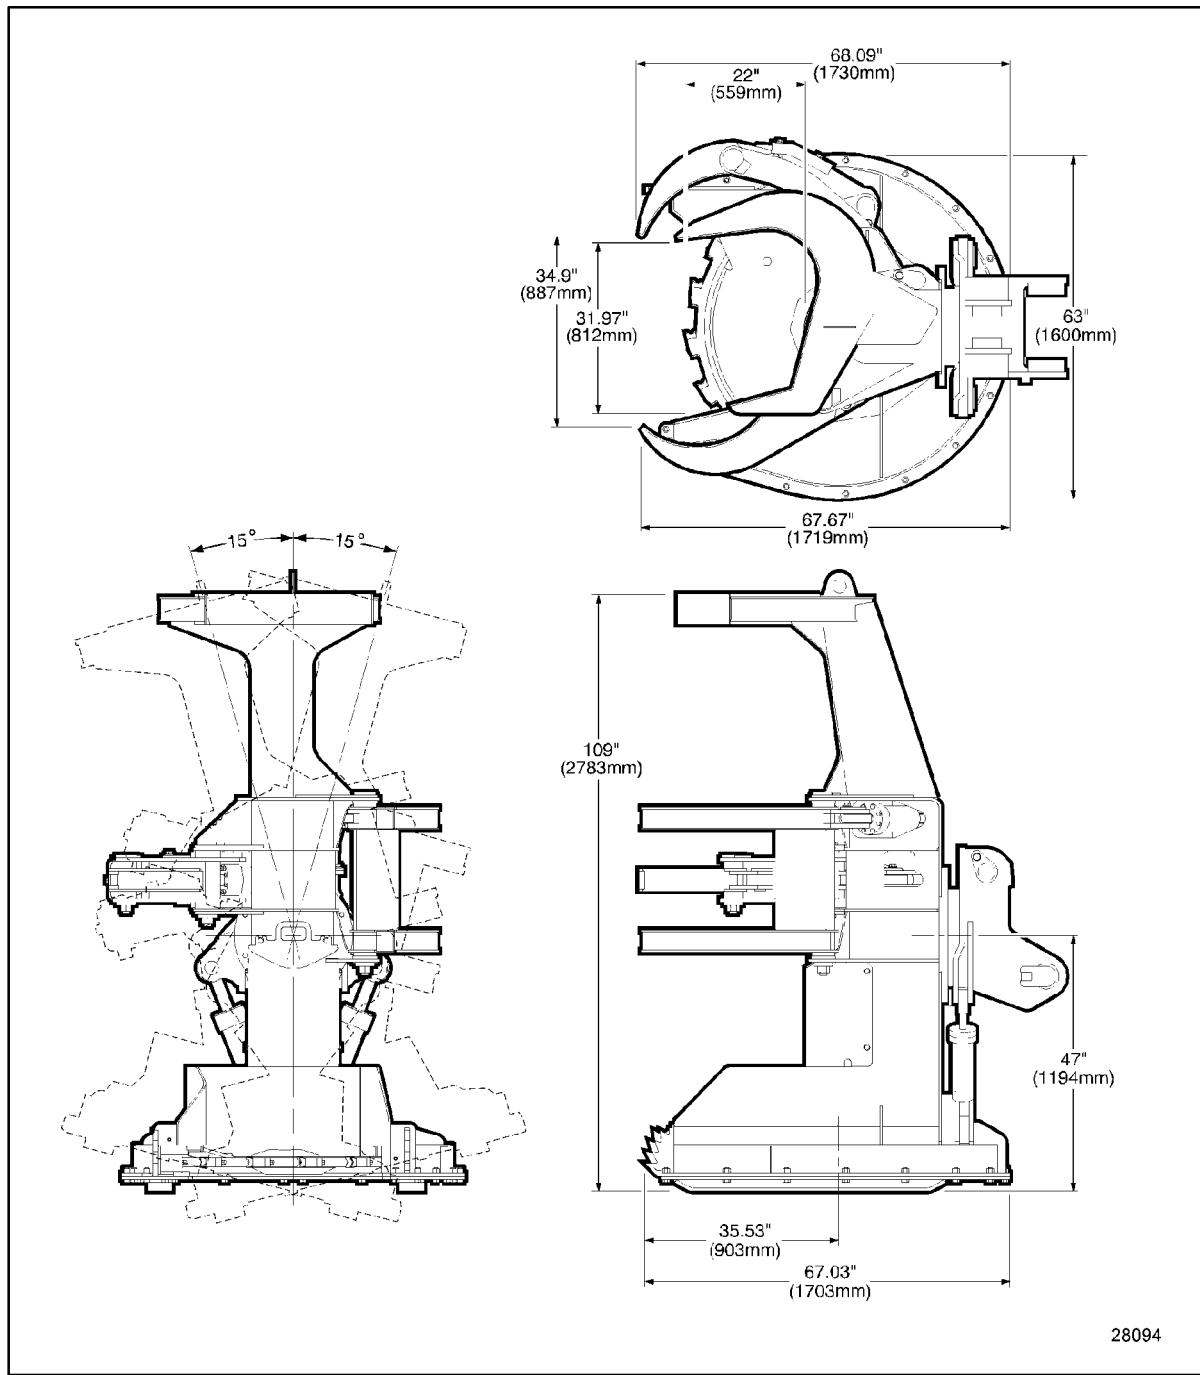

## **1.2 FS20 (Swing to Tree)**

### **1.2.3 General Specifications**

#### **Bolt Torques (lb ft/lubricated)**

|   |   |
|---|---|
| Disc Saw Blade Lower Flange Plate ..... | 280-320 lb. ft. (380-434 Nm) (3/4"-16 UNF)  |
| Lower Guard Plate .....                 | 165 lb. ft. (224 Nm) (locknut end) (3/4"-10 UNC)  |
| Saw Tooth .....                         | 85 lb. ft. (115 Nm) (1/2"-20 UNF)<br>160 lb. ft (216 Nm) (5/8"-18 UNF)                  |
| Saw Drive Motor .....                   | 200-220 lb. ft. (271-298 Nm) (3/4"-10 UNC)  |
| Clamp Arm Pin Retainer Nuts .....       | 300-350 lb. ft. (407-475 Nm) (1.38"-12 UNC)   |
| Clamp Arm Pin Retainer Bolts .....      | 200-220 lb. ft. (271-298 Nm) (3/4"-10 UNC)  |
| Wrist Attachment Pin Retainers .....    | 200-220 lb. ft. (271-298 Nm) (3/4"-10 UNC)<br>475-525 lb. ft. (644-712 Nm) (7/8"-9 UNC) |
| Wrist Bearing Retainer .....            | 450-500 lb. ft. (610-678 Nm) (7/8"-9 UNC)   |
| Wrist Attachment to Bearing .....       | 780-800 lb. ft. (1058-1084 Nm) (1"-14 UNC)  |

#### **Clamp/Wrist Cylinders**

|                          |                    |
|--------------------------|--------------------|
| No. Cylinders .....      | 2 Clamp - 2 Wrist  |
| Bore Diameter .....      | 4.0 in. (101.6 mm) |
| Rod Diameter .....       | 2.0 in. (50.8 mm)  |
| Stroke .....             | 8.5 in. (215.9 mm) |
| Operating Pressure ..... | 3000 psi (207 bar) |

#### **Hydraulic Requirements**

|                            |   |
|----------------------------|---|
| Disc Saw Motor .....       | 30 gpm @ 3500 psi (114 L/m @ 241 bar)<br>25 gpm @ 4000 psi (95 L/m @ 276 bar) |
| Clamp Cylinders .....      | 25 gpm @ 3000 psi (114 L/m @ 207 bar)   |
| Optional Wrist Group ..... | 10 gpm @ 3000 psi (38 L/m @ 207 bar)  |

#### **Miscellaneous**

|                        |   |
|------------------------|---|
| Cutting Capacity ..... | 22" (559 mm) diameter   |
| Weight .....           | 4850 lb. (2200 kg)<br>5350 lb. (2427 kg) (w/optional wrist group) |

#### **Disc Saw Blade**

|   |  |
|---|--|
| Series .....                            | 4000B (NK - Narrow Kerf or WK - Wide Kerf) |
| No. Teeth .....                         | 18 rotatable                               |
| Type .....                              | Curved Carbide/Hardened                    |
| Saw Speed .....                         | 1175 +/- 25 rpm                            |
| Maximum Allowable Saw Disc Runout ..... | 0.100" (2.5 mm)                            |
| Diameter .....                          | 56.0" (1422 mm)                            |
| Weight .....                            | 735 lb. (334 kg)                           |


#### **Note!**

Refer to OEM carrier workshop manual for applicable Service Specifications by Model.

## **1.3 FS22 (Swing to Tree)**


### **1.3.1 Component Description**

- |                                     |   |
|-------------------------------------|---|
| 1. Harvesting Clamp Arms - 7412     | 7. Chip Deflector - 7411                    |
| 2. Accumulating Clamp Arms - 7412   | 8. Lower Guards/Skis - 7411                 |
| 3. Disk Saw Blade - 7430            | 9. Wrist - 7420                             |
| 4. Saw Blade Guard - 7411           | 10. Wrist Cylinder - 7440                   |
| 5. Saw Drive Hydraulic Motor - 7440 | 11. Harvesting Clamp Arms Cylinder - 7440   |
| 6. Nose Extensions                  | 12. Accumulating Clamp Arms Cylinder - 7440 |

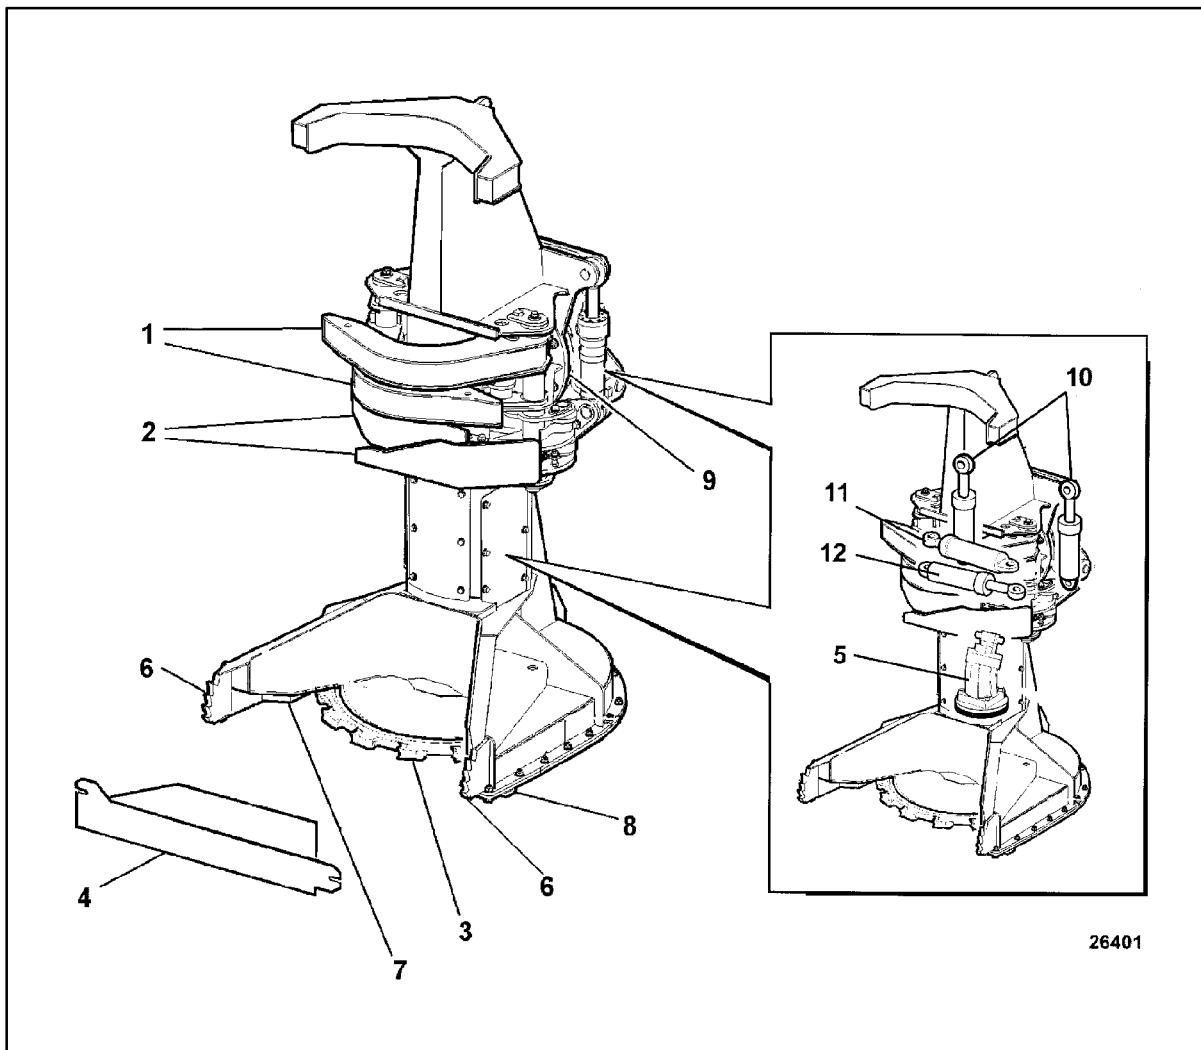

## **1.3 FS22 (Swing to Tree)**

### **1.3.2 General Dimensions**

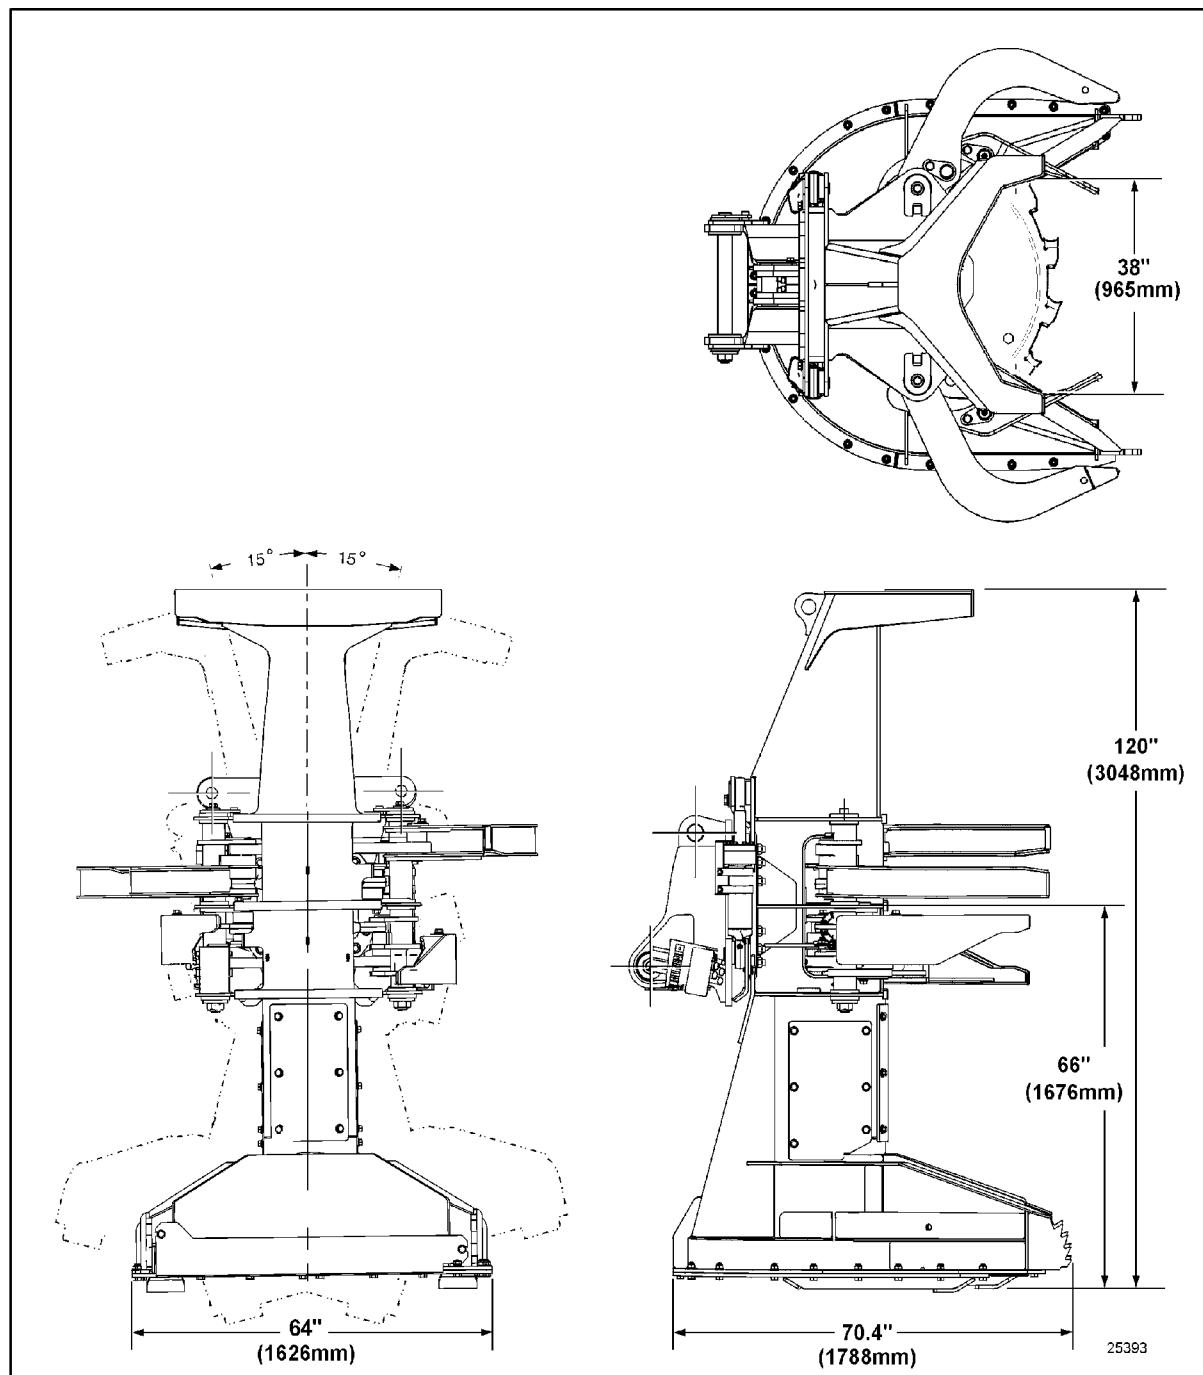

## **1.3 FS22 (Swing to Tree)**

### **1.3.3 General Specifications**

#### **Bolt Torques (lb ft/lubricated)**

|   |  |
|---|--|
| Disc Saw Blade Lower Flange Plate ..... | 280-320 lb. ft. (380-434 Nm) (3/4"-16 UNF)   |
| Lower Guard Plate .....                 | 260-295 lb. ft. (353-400 Nm)<br>..... (locknut end) (M20 x 2.5)                                |
| Saw Tooth .....                         | 85 lb. ft. (115 Nm) (1/2"-20 UNF) - 4000NK<br>..... 160 lb. ft (217 Nm) (5/8"-18 UNF) - 4000WK |
| Saw Drive Motor Mounting .....          | 260-295 lb. ft. (353-400 Nm) (M20 x 2.5)   |
| Clamp Arm Pin Retainers.....            | 1000 - 1300 lb. ft. (1356 - 1763 Nm)<br>(M42 x 4.5)  |

#### **Clamp/Wrist Cylinders**

|                          |  |
|--------------------------|--|
| No. Cylinders .....      | 2 Clamp, 2 Wrist   |
| Bore Diameter .....      | 3.5 in. (88.9 mm)/or 4in. (101.6 mm)                         |
| Rod Diameter .....       | 2.0 in. (50.8 mm)  |
| Stroke .....             | 8.5 in. (215.9 mm)   |
| Operating Pressure ..... | 3625 psi (250 bar) (3.5in)<br>..... 2500 psi (172 bar) (4in) |

#### **Hydraulic Requirements**

|                                 |   |
|---------------------------------|---|
| Disc Saw Motor .....            | 30 gpm @ 3500 psi (114 L/m @ 241 bar)<br>..... 25 gpm @ 4000 psi (95 L/m @ 276 bar)                         |
| Clamp and Wrist Cylinders ..... | 3.5 in. - 26.4 gpm @3625 psi (100 L/m @ 250 bar)<br>..... 4.0 in. - 34.6 gpm @ 2960 psi (131 L/m @ 204 bar) |

#### **Miscellaneous**

|   |                       |
|---|-----------------------|
| Cutting Capacity .....                              | 22" (559 mm) diameter |
| Weight (Fix Boom Adapter and Wide Kerf Blade) ..... | 6440 lb. (2917 kg)    |

#### **Disc Saw Blade**

|   |  |
|---|--|
| Series .....                            | 4000B (NK - Narrow Kerf or WK - Wide Kerf) |
| No. Teeth .....                         | 18 rotatable                               |
| Type .....                              | Curved Carbide/Hardened                    |
| Saw Speed .....                         | 1175 +/- 25 rpm                            |
| Maximum Allowable Saw Disc Runout ..... | 0.100" (2.5 mm)                            |
| Diameter .....                          | 56.0" (1422 mm)                            |
| Weight .....                            | 735 Lbs (334 kg)                           |

#### **Note!**


Refer to OEM carrier workshop manual for applicable Service Specifications by Model.

---

## **1.4 FS24 (Swing to Tree)**

### **1.4.1 Component Description**


- |   |  |
|---|--|
| 1. Upper (Harvesting) Clamp Arms - 7412   | 7. Chip Deflector - 7411                   |
| 2. Lower (Accumulating) Clamp Arms - 7412 | 8. Lower Guards/Skis - 7411                |
| 3. Disc Saw Blade - 7430                  | 9. Wrist - 7420                            |
| 4. Saw Blade Guard - 7411                 | 10. Wrist Cylinder - 7440                  |
| 5. Saw Drive Hydraulic Motor - 7440       | 11. Optional Upper Accumulating Clamp Arms |
| 6. Nose Extensions                        |  |

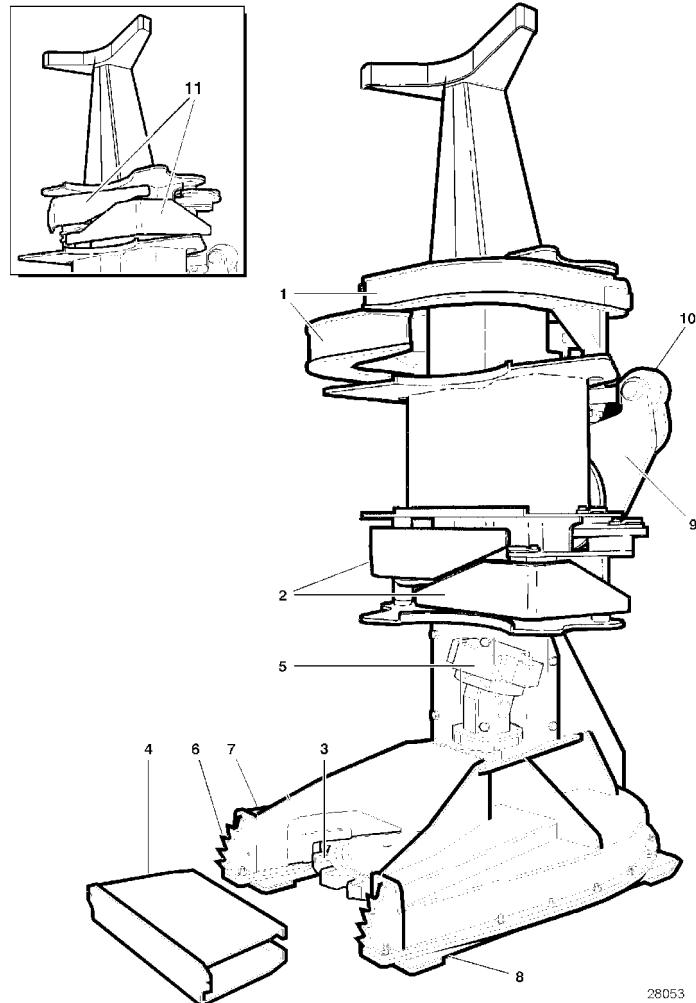

28053

## **1.4 FS24 (Swing to Tree)**

### **1.4.2 General Dimensions**

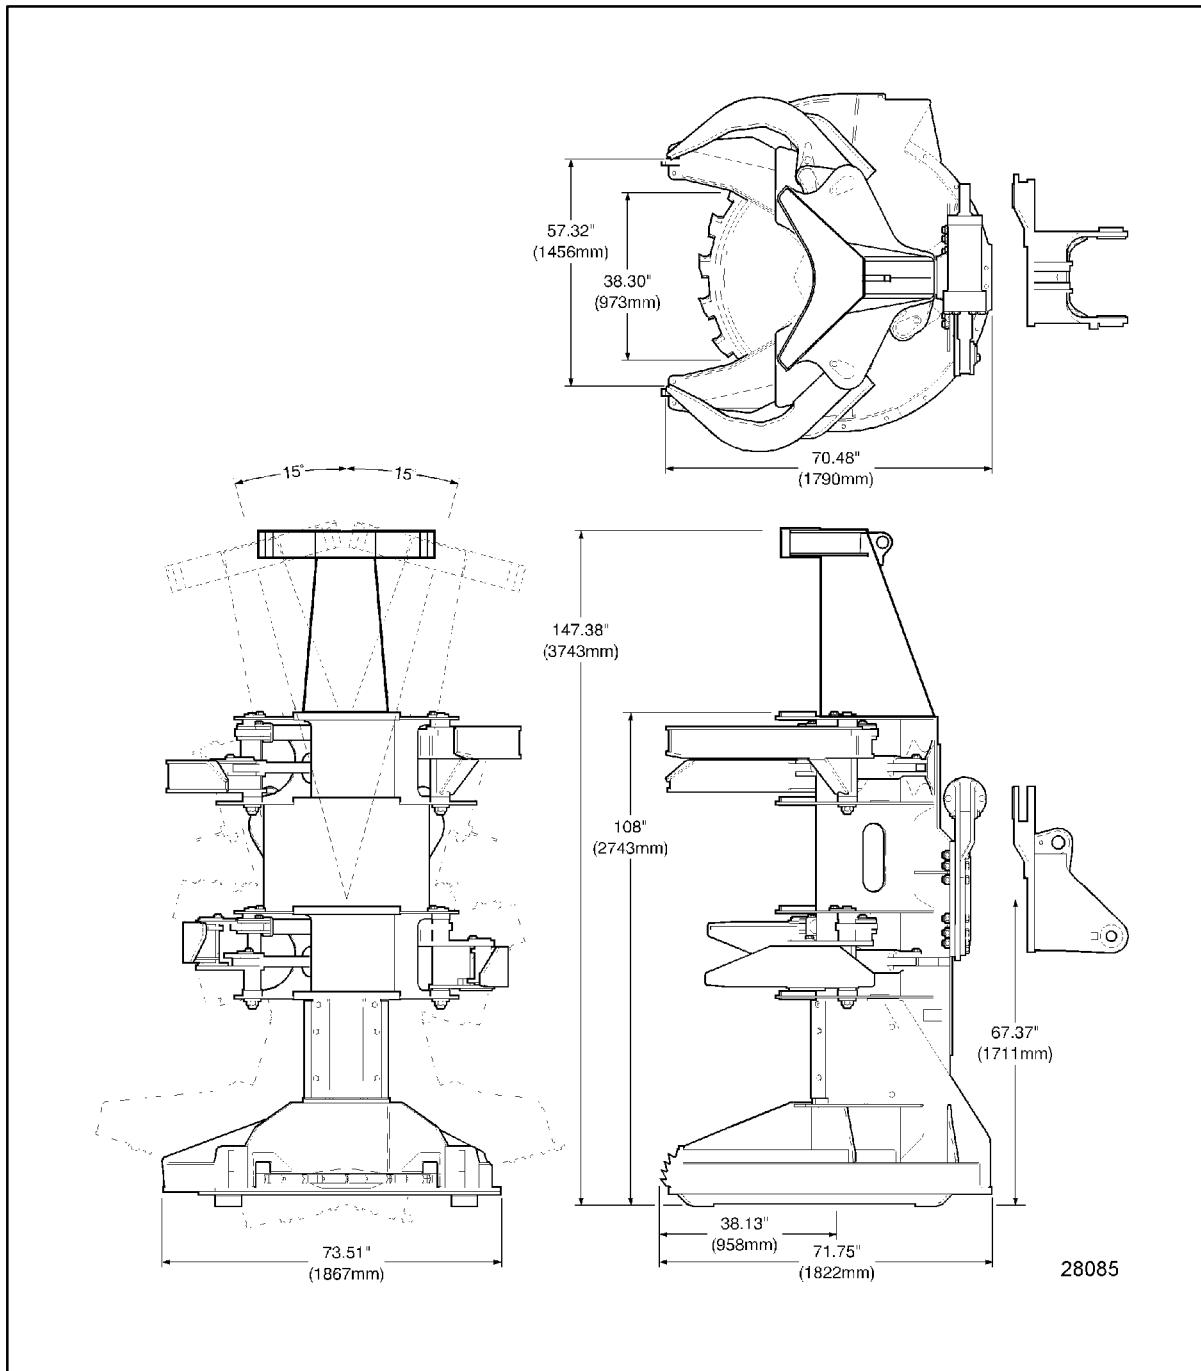

## **1.4 FS24 (Swing to Tree)**

### **1.4.3 General Specifications**

#### **Bolt Torques (lb ft/lubricated)**

|   |  |
|---|--|
| Disc Saw Blade Lower Flange Plate ..... | 280-320 lb. ft. (380-434 Nm) (3/4"-16 UNF)                             |
| Lower Guard Plate .....                 | 165 lb. ft. (224 Nm) (locknut end) (3/4"-10 UNC)                       |
| Saw Tooth .....                         | 85 lb. ft. (115 Nm) (1/2"-20 UNF)<br>160 lb. ft (216 Nm) (5/8"-18 UNF) |
| Saw Drive Motor .....                   | 200-220 lb. ft. (271-298 Nm) (3/4"-10 UNC)                             |
| Clamp Arm Pin Retainers .....           | 150-180 lb. ft. (203-244 Nm) (3/4"-10 UNC)                             |

#### **Clamp Cylinders**

|                          |                      |
|--------------------------|----------------------|
| No. Cylinders .....      | 2                    |
| Bore Diameter .....      | 3.5 in. (88.9 mm)    |
| Rod Diameter .....       | 2.0 in. (50.8 mm)    |
| Stroke .....             | 12.38 in. (314.5 mm) |
| Operating Pressure ..... | 3000 psi (207 bar)   |

#### **Wrist Cylinder**

|                          |                    |
|--------------------------|--------------------|
| No. Cylinders .....      | 1                  |
| Bore Diameter .....      | 6.0 in. (150 mm)   |
| Rod Diameter .....       | 3.0 in. (76.2 mm)  |
| Stroke .....             | 11.2 in. (284 mm)  |
| Operating Pressure ..... | 3000 psi (207 bar) |

#### **Hydraulic Requirements**

|                            |   |
|----------------------------|---|
| Disc Saw Blade Moror ..... | 30 gpm @ 3500 psi (114 L/m @ 241 bar)<br>25 gpm @ 4000 psi (95 L/m @ 276 bar) |
| Clamp Cylinders .....      | 30 gpm @ 3000 psi (114 L/m @ 204 bar)   |
| Wrist Cylinder .....       | 10 gpm @ 3000 psi (371 L/m @ 204 bar)   |

#### **Miscellaneous**

|                        |                       |
|------------------------|-----------------------|
| Cutting Capacity ..... | 24" (610 mm) diameter |
| Weight .....           | 7900 lb. (3582 kg)    |

#### **Disc Saw Blade**

|   |                             |
|---|-----------------------------|
| Series .....                            | 4000B (WK - Wide Kerf only) |
| No. Teeth .....                         | 20 rotatable                |
| Type .....                              | Hardened                    |
| Saw Speed .....                         | 1100 +/- 25 rpm             |
| Maximum Allowable Saw Disc Runout ..... | 0.100" (2.5 mm)             |
| Diameter .....                          | 60.5" (1537 mm)             |
| Weight .....                            | 809 lb. (367 kg)            |

#### **Note!**

Refer to OEM carrier workshop manual for applicable Service Specifications by Model.

## **1.5 Torque Values**



The following torque values are for use in general applications and where torque values are not otherwise specified.

### **1.5.1 Steel Fasteners**


This Standard applies to steel cap screws engaged with steel female thread and is applicable for all thread pitches. Torque values for other materials are to be specified on the drawings where needed.

#### **Fastener Markings**


Grade 8 - Imperial



Class 10.9 - Metric



Class 12.9 - Metric



## **1.5 Torque Values**

### **1.5.1 Steel Fasteners**

#### **Imperial Hex Head**

| Nominal Thread Diameter |        | Tightening Torque Values for Grade 8 |      |        |      |
|-------------------------|--------|--------------------------------------|------|--------|------|
|                         |        | Nm                                   |      | lb.ft. |      |
|                         |        | Min                                  | Max  | Min    | Max  |
| 1/4                     | 0.2500 | 12                                   | 14   | 9      | 10   |
| 5/16                    | 0.3125 | 24                                   | 27   | 18     | 20   |
| 3/8                     | 0.3750 | 50                                   | 55   | 34     | 40   |
| 7/16                    | 0.4375 | 80                                   | 90   | 60     | 65   |
| 1/2                     | 0.5000 | 125                                  | 135  | 90     | 100  |
| 9/16                    | 0.5625 | 170                                  | 190  | 125    | 140  |
| 5/8                     | 0.6250 | 240                                  | 255  | 175    | 190  |
| 3/4                     | 0.7500 | 405                                  | 455  | 300    | 330  |
| 7/8                     | 0.8750 | 645                                  | 710  | 475    | 525  |
| 1                       | 1.000  | 985                                  | 1085 | 725    | 800  |
| 1-1/8                   | 1.125  | 1425                                 | 1595 | 1050   | 1175 |
| 1-1/4                   | 1.250  | 2000                                 | 2205 | 1475   | 1625 |
| 1-3/8                   | 1.375  | 2710                                 | 2980 | 2000   | 2200 |
| 1-1/2                   | 1.500  | 3525                                 | 3865 | 2600   | 2850 |
| 1-5/8                   | 1.625  | 4680                                 | 5150 | 3450   | 3800 |
| 1-3/4                   | 1.750  | 5850                                 | 6510 | 4300   | 4800 |
| 1-7/8                   | 1.875  | 8270                                 | 7460 | 5500   | 6100 |
| 2                       | 2.000  | 8810                                 | 9760 | 6500   | 7200 |

## **1.5 Torque Values**

### **1.5.1 Steel Fasteners**

#### **Metric Hex Head**

| Nominal Thread Diameter | Tightening Torque Values |      |        |      |            |      |        |      |
|-------------------------|--------------------------|------|--------|------|------------|------|--------|------|
|                         | Class 10.9               |      |        |      | Class 12.9 |      |        |      |
|                         | Nm                       |      | lb.ft. |      | Nm         |      | lb.ft. |      |
|                         | Min                      | Max  | Min    | Max  | Min        | Max  | Min    | Max  |
| M5                      | 7                        | 8    | 5      | 6    | 8          | 9    | 6      | 7    |
| M6                      | 12                       | 14   | 9      | 10   | 14         | 16   | 10     | 12   |
| M8                      | 30                       | 35   | 22     | 24   | 35         | 40   | 25     | 28   |
| M10                     | 55                       | 65   | 42     | 48   | 65         | 75   | 50     | 56   |
| M12                     | 100                      | 115  | 75     | 85   | 120        | 135  | 85     | 100  |
| M14                     | 165                      | 185  | 120    | 135  | 190        | 210  | 140    | 155  |
| M16                     | 250                      | 285  | 185    | 210  | 290        | 330  | 215    | 245  |
| M20                     | 490                      | 550  | 360    | 405  | 570        | 645  | 420    | 475  |
| M22                     | 665                      | 745  | 490    | 550  | 775        | 875  | 570    | 645  |
| M24                     | 840                      | 950  | 620    | 700  | 1000       | 1125 | 725    | 820  |
| M30                     | 1700                     | 1900 | 1250   | 1400 | 1950       | 2200 | 1450   | 1625 |
| M36                     | 2900                     | 3300 | 2150   | 2450 | 3425       | 3850 | 2525   | 2850 |
| M42                     | 4675                     | 5250 | 3450   | 3900 | 5500       | 6150 | 4050   | 4550 |
| M48                     | 7050                     | 7900 | 5200   | 5800 | 8200       | 9200 | 6050   | 6800 |

## **1.5 Torque Values**

### **1.5.1 Steel Fasteners**

#### **Metric Flanged Hex Head**

| Nominal Thread Diameter | Tightening Torque Values for Class 10.9 |     |        |     |
|-------------------------|---|-----|--------|-----|
|                         | Nm                                      |     | lb.ft. |     |
|                         | Min                                     | Max | Min    | Max |
| M5                      | 7                                       | 8   | 5      | 6   |
| M6                      | 12                                      | 15  | 9      | 11  |
| M8                      | 32                                      | 38  | 23     | 26  |
| M10                     | 60                                      | 70  | 45     | 50  |
| M12                     | 110                                     | 125 | 80     | 90  |
| M14                     | 170                                     | 190 | 125    | 140 |
| M16                     | 265                                     | 300 | 195    | 220 |
| M20                     | 515                                     | 575 | 380    | 425 |
| M22                     | 665                                     | 745 | 490    | 550 |
| M24                     | 840                                     | 950 | 620    | 700 |

Notes:

1. Torque values shown are based on Zinc Phosphate or oil coating.
2. The torque values listed develop clamping forces that are based on material proof loads for the different class fasteners. The clamping forces developed are  $85 \pm 5\%$  of proof loads.
3. All the torque values in Nm or lb.ft. are rounded to the nearest multiple of 5, or in some cases, to the nearest whole number to be in line with graduations on torque wrenches and dials.



#### **CAUTION**

**Use only metric tools on metric hardware and imperial tools on imperial hardware to assure correct torque readings, and to prevent damage to tools and hardware as well as possible injury.**

## **1.5 Torque Values**

### **1.5.2 Hydraulic Fittings**

This standard establishes torques for various types of hydraulic fittings.

#### **O-Ring Fittings**

All O-Rings must have a light coat of system fluid before tightening to the torque in the following chart.

| O-Ring Face Seal End |                   |         | Nominal SAE Dash No. | O-Ring Boss End |                                    |         |  |
|----------------------|-------------------|---------|----------------------|-----------------|------------------------------------|---------|--|
| Thread Size          | Swivel Nut Torque |         |                      | Thread Size     | Straight Fitting or Locknut Torque |         |  |
|                      | Nm                | lb.ft   |                      |                 | Nm                                 | lb.ft.  |  |
| 9/16-18              | 14-16             | 10-12   | -4                   | 7/16-20         | 20-22                              | 14-16   |  |
| 11/16-16             | 24-27             | 18-20   | -6                   | 9/16-18         | 33-35                              | 24-26   |  |
| 13/16-16             | 43-47             | 32-35   | -8                   | 3/4-16          | 68-78                              | 50-60   |  |
| 1-14                 | 60-68             | 46-50   | -10                  | 7/8-14          | 98-110                             | 72-80   |  |
| 1-3/16-12            | 90-95             | 65-70   | -12                  | 1-1/16-12       | 170-183                            | 125-135 |  |
| 1-3/16-12            | 90-95             | 65-70   | -14                  | 1-3/16-12       | 215-245                            | 160-180 |  |
| 1-7/16-12            | 125-135           | 92-100  | -16                  | 1-5/16-12       | 270-300                            | 200-220 |  |
| 1-11/16-12           | 170-190           | 125-140 | -20                  | 1-5/8-12        | 285-380                            | 210-280 |  |
| 2-12                 | 200-225           | 150-165 | -24                  | 1-7/8-12        | 370-490                            | 270-360 |  |

Ref: SAE J1453 June '94

## **1.5 Torque Values**

### **1.5.2 Hydraulic Fittings**

#### **SAE Code 61 and 62 Flanges**

For both one piece and split flanges turn the bolts until mating parts are in full contact. Tighten one bolt, then the opposite, followed by the remaining two before applying torque.

| Flange Size | Flange Dash No. | Code 61 - Standard Pressure Series |         |             | Code 62 - High Pressure Series |         |             |
|-------------|-----------------|------------------------------------|---------|-------------|--------------------------------|---------|-------------|
|             |                 | Torque lb.ft.                      | Nm      | Bolt Thread | Torque lb.ft.                  | Nm      | Bolt Thread |
| 1/2         | -08             | 15-19                              | 20-25   | 5/16-18     | 15-19                          | 20-25   | 5/16-18     |
| 3/4         | -12             | 21-30                              | 28-40   | 3/8-16      | 25-34                          | 34-45   | 3/8-16      |
| 1           | -16             | 27-36                              | 37-48   | 3/8-16      | 42-50                          | 56-68   | 7/16-14     |
| 1-1/4       | -20             | 35-46                              | 48-62   | 7/16-14     | 63-75                          | 85-102  | 1/2-13      |
| 1-1/2       | -24             | 46-59                              | 62-79   | 1/2-13      | 117-134                        | 158-181 | 5/8-11      |
| 2           | -32             | 54-67                              | 73-90   | 1/2-13      | 271-294                        | 200-217 | 3/4-10      |
| 2-1/2       | -40             | 79-92                              | 107-124 | 1/2-13      |                                |         |             |
| 3           | -48             | 138-150                            | 186-203 | 5/8-11      |                                |         |             |

Ref: SAE J518 June '93

## **1.5 Torque Values**

### **1.5.2 Hydraulic Fittings**

#### **Tapered Pipe Threads (NPTF & NPT)**

| Pipe Thread Size | Dash No. | Threads with sealant (Loctite) |    | Pipe Thread Size | Dash No. | Threads with sealant (Loctite) |     |
|------------------|----------|--------------------------------|----|------------------|----------|--------------------------------|-----|
|                  |          | lb.ft.                         | Nm |                  |          | lb.ft.                         | Nm  |
| 1/8-27           | -02      | 15                             | 20 | 1-11-1/2         | -16      | 55                             | 75  |
| 1/4-18           | -04      | 18                             | 25 | 1-1/4-11-1/2     | -20      | 70                             | 95  |
| 3/8-18           | -06      | 26                             | 35 | 1-1/2-11-1/2     | -24      | 81                             | 110 |
| 1/2-14           | -08      | 33                             | 45 | 2-11-1/2         | -32      | 96                             | 130 |
| 3/4-14           | -10      | 44                             | 60 |                  |          |                                |     |

**BUY NOW**

**Then Instant Download  
the Complete Manual**

**Thank you very much!**