NISSAN FORKLIFT SERVICE MANUAL & TECHNICAL BULLETIN MODEL P01 & P02 SERIES

INTRODUCTION

This service manual has been prepared to provide necessary information concerning the maintenance and repair procedures for the NISSAN FORKLIFT P01 and P02 series.

Any changes effected in the series after publication of this service manual will be announced in a technical bulletin. It is, therefore, recommended that each relevant technical bulletin be inserted in front of each section and be used together with the service manual as a reference.

If a new model requires different service method or has undergone a major change, revised sections will be issued to replace the applicable sections. Each revised section will include the description of how to service the parts for the former specifications. The publication of a revised section will be announced in the technical bulletin.

This service manual consists of fourteen sections as shown in the following table, which gives the updated symbols. When a revised service manual is issued, this "INTRODUCTION" sheet should be replaced with a revised one.

Section	Symbol
GENERAL INFORMATION	(GI)
MAINTENANCE	(MA)
CONTROL SYSTEM	(CS)
BATTERY & CHARGER	(BC)
ELECTRICAL SYSTEM	(EL)
MOTOR MECHANISM	(MM)
DIFFERENTIAL CARRIER	(DF)
FRONT AXLE	(FA)
REAR AXLE	(RA)
BRAKE SYSTEM	(BR)
STEERING SYSTEM	(ST)
HYDRAULIC SYSTEM	(HD)
LOADING MECHANISM	(LM)
BODY & FRAME	(BF)

Printed in Japan

Edition: February 1996 Printing: March 2001 (03) Publication No. SM6E-P012G0 This manual contains maintenance and repair procedures.

In order to assure your safety and the efficient functioning of the lift truck, this manual should be read thoroughly. It is especially important that the PRECAUTIONS in the GI section be completely understood before starting any repair task.

All information in this manual is based on the latest product information at the time of publication. The right is reserved to make changes in specifications and methods at any time without notice.

IMPORTANT SAFETY NOTICE

The proper performance of service is essential for both the safety of the technician and the efficient functioning of the lift truck.

The service methods in this Service Manual are described in such a manner that the service may be performed safely and accurately.

Service varies with the procedures used, the skills of the technician and the tools and parts available. Accordingly, anyone using service procedures, tools or parts which are not specifically recommended by NISSAN must first be completely satisfied that neither personal safety nor the lift truck's safety will be jeopardized by the service method selected.

No modifications or alterations to a powered industrial truck, which may affect, for example, capacity, stability or safety requirements of the truck shall be made without the prior written approval of NISSAN, its authorized representative, or a successor thereof. Contact an authorized NISSAN FORKLIFT dealer before making any modification or alteration to your industrial truck that may affect, for example braking, steering, visibility and the addition of removable attachments. After getting approval of NISSAN, its authorized representative, or a successor thereof, capacity plate, decals tags and operation and maintenance handbooks shall also be changed to the appropriate one.

Only in the event that NISSAN is no longer in business and there is no successor in the interest to the business, the user may arrange for a modification or alteration to a powered industrial truck, provided, however, that the user shall:

- A. Arrange for the modification or alteration to be designed, tested and implemented by an engineer(s) expert in industrial trucks and their safety;
- B. Maintain a permanent record of the design, test(s) and implementation of the modification or alteration;
- C. Approve and make appropriate changes to the capacity plate(s), decals, tags and Instruction Handbook;
- D. Affix a permanent and readily visible label to the truck stating the manner in which the truck has been modified or altered together with the date of the modification or alteration, and the name and address of the organization that accomplished the tasks.

GENERAL INFORMATION



CONTENTS

HOW TO USE THIS MANUAL	2
Outline of This Manual	
Technical Term Definitions	
Manual Illustrations	
HOW TO READ WIRING DIAGRAMS	6
Description	
IDENTIFICATION INFORMATION	
Vehicle Model Classification Number	

Vehicle Identification Number	
Identification Plate	
GENERAL PRECAUTIONS	
JACKING, TOWING AND LIFTING	
Jacking	
Towing (Freeing a stuck vehicle)	
Lifting	
TIGHTENING TORQUE OF STANDARD BOLTS .	

Outline of This Manual

Section symbol	Section title	Topics	
GI	General information	How to use this manual, identification information, general precautions, jacking, lifting, towing and tightening torque of standard bolts.	
MA	Maintenance	Inspection, adjustment, part replacement and lubricant replen- ishment	
CS	Control system	Precautions, controller unit inspection and adjustment, meter panel, LCD letter display mode description, trouble diagnostic procedures, trouble diagnoses for controller and battery charg- ing systems.	
BC	Battery and battery charger	Precautions, battery and battery charger.	
EL	Electrical system	Precautions, electrical component parts, location of electrical units, harness layout, fuses, lighting system, meter panel, mis- cellaneous electrical parts and location of optional parts.	
MM	Motor mechanism	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, traction motor, hydraulic pump motor, power steering motor and motor inspec- tion.	
DF	Differential carrier	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, construction, removal, disassembly, inspection, assembly and installation.	
FA	Front axle	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, construction, component parts, hub and axle housing.	
RA	Rear axle	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, construction, compo- nent parts, removal, inspection, installation and adjustment.	
BR	Brake system	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, construction, brake assembly, brake pedal, master cylinder, brake piping and park- ing brake.	
ST	Steering system	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, steering wheel, st ing column assembly, steering gear box, power cylinder and steering linkage.	
HD	Hydraulic system	Service data and specifications, trouble diagnoses and corrections, precautions and preparation, hydraulic piping system, hydraulic pump (gear pump), control valve, control lever, tilt cylinder, lift (mast) cylinder and oil tank.	
LM	Loading mechanism	Service data, trouble diagnoses and corrections, precautions and preparation, construction, backrest, lift chain, carriage assembly and mast assembly.	
BF	Forklift body and frame	Service data, precautions, construction, removal, installation, body parts and accessories.	

This Manual contains the essential information required to perform effective forklift maintenance procedures. All forklift units are included. Informational configuration in the CS (control system) section differs from that of other sections. The CS section introduces how to utilize information in the section.

HOW TO USE THIS MANUAL

Outline of This Manual (Cont'd) MAIN TEXT ENTRIES

Main text entries describe unit removal, unit disassembly, inspection, unit reassembly, unit installation and adjustment procedures. Step-by-step descriptions are provided for all of these procedures.

Together with the step-by-step descriptions, other important information is provided. This information includes service points and tips, basic units and values, required specified tightening torques and required special service tools. Information pertaining to common tools generally found in all maintenance facilities is generally omitted. This information is included in the exploded part views and other drawings as required.

OTHER ENTRIES

The following information is included at the beginning of all sections as a supplement to the main text.

Service data and specifications

Adjustment values, part selection information and specified tightening torque values are shown for all procedures described in the main text.

Trouble diagnoses and corrections

Individual symptoms, probable causes and remedial measures indicated by these symptoms are described.

Precautions and preparation

- Precautionary and reference information related to the entire section is provided.
- Special service tools are required for some maintenance procedures. Special service tool name, tool number and tool application information as well as illustrations depicting tool shapes are included.

Technical Term Definitions

SPECIFIC TERMS

WARNING:

Warns you of instructions that must be followed to prevent severe personal injury and/or fatal accident.

CAUTION:

Warns you of instructions that must be followed to prevent personal injury and/or damage to some parts of the vehicle.

NOTE:

Provides helpful information to perform a smooth and effective service procedure.

Standard value or specifications:

The allowable range for a given measured value during inspection and adjustment.

Limit value:

The maximum or minimum acceptable measured value during inspection and adjustment.

SM P01/P02 GI (196 2)

5

18118-1 2-11

HOW TO USE THIS MANUAL

Technical Term Definitions (Cont'd) MEASURING UNITS AND VALUES

Specified torque, pressure, force and other values used in this Manual are primarily expressed as the SI unit (International System of Unit). The values following the SI unit and enclosed in parentheses () are expressed in the metric system and in the yard/pound system.

Example:

Tightening torque: 9 - 12 N·m (0.9 - 1.2 kg-m, 6.5 - 8.7 ft-lb)

SI unit Metric system Yard/pound system

Main unit conversions

	SI unit	Metric system	Yard/pound system	Conversion factor to SI unit
Torque and	N∙m	kg-m		9.807
moment			ft-lb	1.356
Force	N	kg		9.807
			lb	4.448
Pressure	kPa	kg/cm ²		98.07
		_	psi	6.895
	МРа	kg/cm ²	—	0.0981
			psi	0.0069

NOTE:


Converting the unit in metric system or yard/pound system to SI unit is shown below.

Unit in metric system or yard/pound system x conversion factor = SI unit

Manual Illustrations

EXPLODED VIEWS


These contain part names, tightening torques, lubrication points and other information necessary to perform removal, disassembly, repair, reassembly and installation procedures. (See example below.)

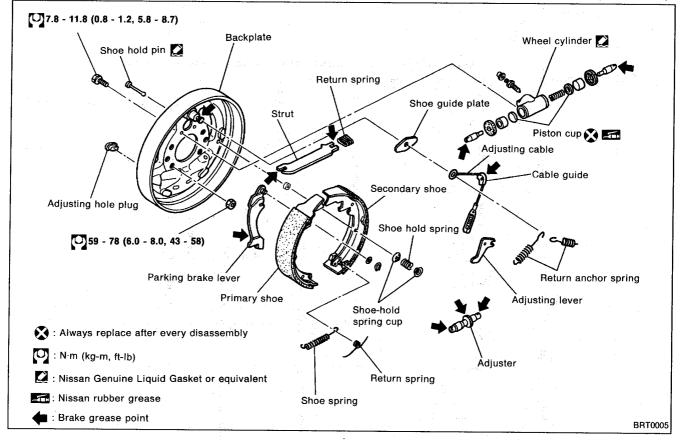


Symbols used in exploded views

((|

Symbol	Meaning	Symbol	Meaning
0	Specified tightening torque is required for part installation. When a torque range is given, use the average figure as the standard.	19 A 🛞 🔹	Always replace after every disassembly.
-4=+	Should be lubricated with specified grease.	*	Select parts of proper thickness.
	Should be lubricated with oil.		Adjustment is required.
	Sealing point		

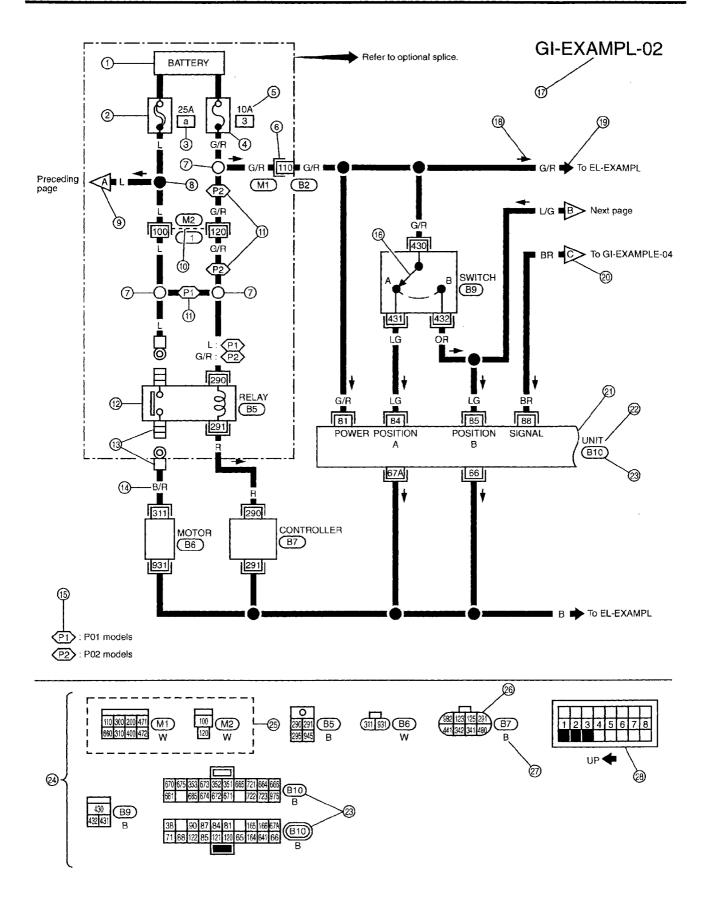

GIM0002

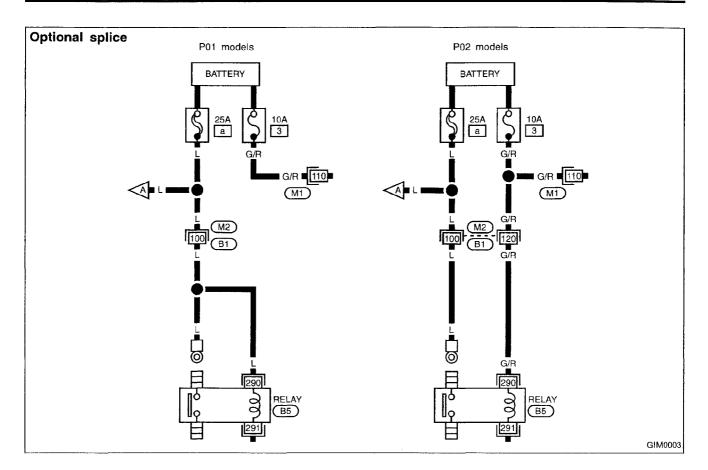

HOW TO READ WIRING DIAGRAMS

Description


Number	Item	Description	
1	Power condition	• This shows the condition when the system receives battery positive (+) volt- age (can be operated).	
2	Fusible link	 The double line shows that this is a fusible link. The open circle shows current flow in, and the shaded circle shows current flow out. 	
3	Fusible link/fuse location	• This letter or number shows the location of the fusible link, or fuse in the fus- ible link or fuse box.	
4	Fuse	 The single line shows that this is a fuse. The open circle shows current flow in, and the shaded circle shows current flow out. 	
5	Current rating	This shows the current rating of the fusible link or fuse.	
6	Connectors	 This shows that connector (M1) is female and connector (B2) is male. The G/R wire is located in the 110 terminal of both connectors. 	
Ĩ	Optional splice	• The open circle shows that the splice is optional depending on vehicle appli- cation.	
8	Splice	• The shaded circle shows that the splice is always on the vehicle (standard specifications).	
9	Page crossing	 This arrow shows that the circuit continues to an adjacent page. The A will match with the A on the preceding or next page. 	
10	Common connector	• The dotted lines between terminals show that these terminals are part of the same connector.	
1	Option abbreviation	• This shows that the circuit is optional depending on vehicle application.	
12	Relay	This shows an internal representation of the relay.	
13	Connectors	• This shows that the connector is connected to the body or a terminal with bolt or nut.	
14)	Wire color	 This shows a code for the color of the wire. B = Black BR = Brown W = White OR = Orange R = Red P = Pink G = Green PU = Purple L = Blue GY = Gray Y = Yellow SB = Sky Blue LG = Light Green CH = Dark Brown DG = Dark Green When the wire color is striped, the base color is given first, followed by the stripe color as shown below: Example: L/W = Blue with White Stripe 	
15	Option description	• This shows a description of the option abbreviation used on the page.	
(6)	Switch	• This shows that continuity exists between terminals 430 and 431 when the switch is in the A position. Continuity exists between terminals 430 and 432 when the switch is in the B position.	
Ø	Cell code	 This identifies each page of the wiring diagram by section, system and wiring diagram page number. 	
(18)	Current flow arrow	 Arrow indicates electric current flow, especially where the direction of standard flow (vertically downward or horizontally from left to right) is difficult to follow. A double arrow "←→" shows that current can flow in either direction depending on circuit operation. 	

HOW TO READ WIRING DIAGRAMS

Description (Cont'd)

Number	Item	Description
19	System branch	• This shows that the system branches to another system identified by cell code (section and system).
20	Page crossing	 This arrow shows that the circuit continues to another page identified by cell code. The C will match with the C on another page within the system other than the next or preceding pages.
Ø	Component box in wave line	• This shows that another part of the component is also shown on another page (indicated by wave line) within the system.
22)	Component name	This shows the name of a component.
Ø	Connector number	 This shows the connector number. The letter shows which harness the connector is located in. For detail and to locate the connector, refer to EL section ("Main Harness", "HARNESS LAYOUT"). A coordinate grid is included for complex harnesses to aid in locating connectors. Harness side connectors: shown in
24)	Connector views	• This area shows the connector faces of the components in the wiring dia- gram on the page.
25)	Common component	• Connectors enclosed in broken line show that these connectors belong to the same component.
26)	Terminal No.	• This shows the terminal number indicated in the connector on the manual- end wiring diagram. Refer to the diagram at the manual end.
27)	Connector color	• This shows a code for the color of the connector.
8	Fuse box	• This shows the arrangement of fuses. The open square shows current flow in, and the shaded square shows cur- rent flow out.

IDENTIFICATION INFORMATION

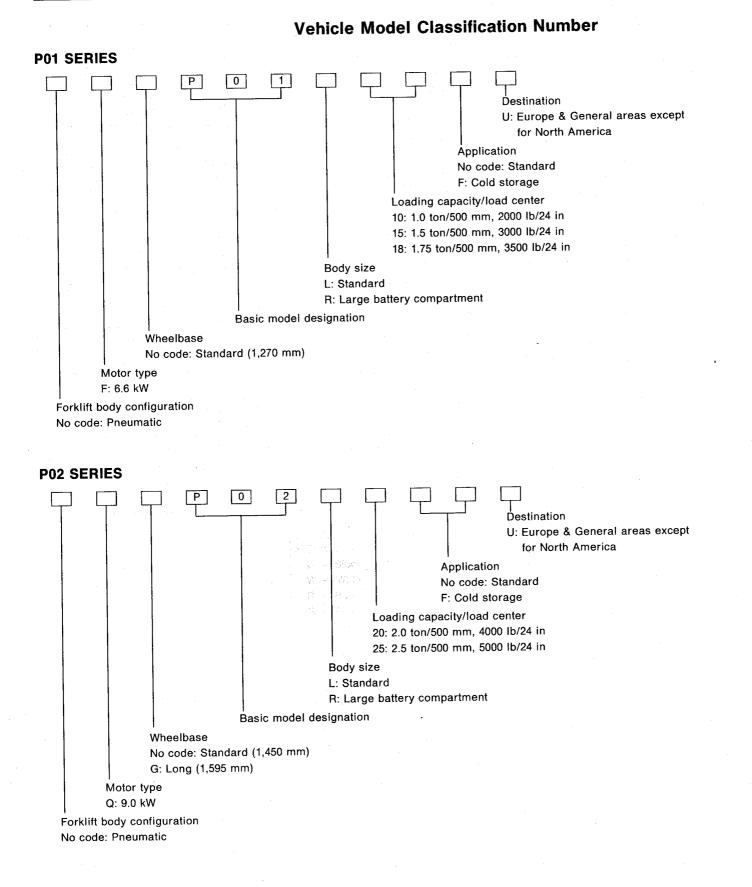

BUY NOW Then Instant Download the Complete Manual Thank you very much!