

CRAWLER EXCAVATOR CX290B SERVICE MANUAL

TABLE OF CONTENTS

DIVISION/SECTION	SECTION N°	REFERENCE N°
1 GENERAL INFORMATION		
Safety, general information and standard torque data	1001	7-27691EN
General specifications and special torque setting.....	1002	SC290B1002-0EN
2 ENGINE		
Engine specifications	*	
Disassembly and assembly of the engine	*	
3 FUEL SYSTEM		
Fuel tank	3001	SM160B3001-0EN
Fuel engine system	*	
4 ELECTRICAL SYSTEM		
Electrical system, electrical and electronic troubleshooting.....	4001	SC210B4001-1EN
Electrical equipment and electrical circuit diagrams	4020	SC210B4020-0EN
5 UNDERCARRIAGE		
Removal and installation of tracks	5001	SM160B5001-0EN
Sprocket	5004	SM160B5004-0EN
6 DRIVE TRAIN		
Drive motor and final drive transmission removal and installation	6001	SM160B6001-0EN
Travel reduction gear assembly and disassembly	6005	SM290B6005-0EN
7 UNDERCARRIAGE HYDRAULICS		
8 UPPERSTRUCTURE HYDRAULICS		
Depressurising and decontaminating the hydraulic system, use of the vacuum pump and bleeding the components	8000	SM160B8000-0EN
Specifications, troubleshooting, checks and hydraulic pressure settings.....	8001	SC290B8001-0EN
Hydraulic reservoir removal and installation	8002	SM160B8002-0EN
Main and pilot pumps, removal and installation	8003	SM210B8003-0EN
Main hydraulic control valve, removal and installation	8004	SM210B8004-0EN
Pilot blocs, removal and installation	8007	SM160B8007-0EN
Main hydraulic pump, disassembly and assembly	8010	SM210B8010-0EN
Hand control levers, disassembly and assembly	8013	SM160B8013-0EN
Foot control levers, disassembly and assembly	8014	SM160B8014-0EN
Caution valve, disassembly and assembly.....	8016	SM160B8016-0EN
Hydraulic functions.....	8020	SC290B8020-0EN
Travel hydraulic motor, disassembly and assembly.....	8021	SM290B8021-0EN
Hydraulic Component Functions.....	8030	SC290B8030-0EN

DIVISION/SECTION	SECTION N°	REFERENCE N°
9 UPPERSTRUCTURE		
Quick coupler	9000	SM160B9000-0EN
Boom, dipper and bucket	9003	SM160B9003-0EN
Seat, removal and installation	9004	SM160B9004-0EN
Cab and cab equipment	9005	SM160B9005-0EN
Air conditioner functions and troubleshooting	9006	SC210B9006-0EN
Large size hydraulic schematics	Pocket	87600999A
Large size electrical schematics	Pocket	87601005A

* *Consult the Engine Service Manual*

NOTE: CNH Company reserves the right to make changes in the specification and design of the machine without prior notice and without incurring any obligation to modify units previously sold.

The description of the models shown in this manual has been made in accordance with the technical specifications known as of the date of design of this document.

Section

1001

**SAFETY, GENERAL INFORMATION
AND TORQUE SPECIFICATIONS**

TABLE OF CONTENTS

GENERAL INFORMATION	3
SAFETY.....	4
STANDARD TORQUE DATA FOR CAP SCREWS AND NUTS.....	6



WARNING : *This symbol is used in this manual to indicate important safety messages. Whenever you see this symbol, carefully read the message that follows, as there is a risk of serious injury.*

GENERAL INFORMATION

Cleaning

Clean all metal parts except bearings, in a suitable cleaning solvent or by steam cleaning. Do not use caustic soda for steam cleaning. After cleaning, dry and put oil on all parts. Clean oil passages with compressed air. Clean bearings in a suitable cleaning solvent, dry the bearings completely and put oil on the bearings.

Inspection

Check all parts when the parts are disassembled. Replace all parts that have wear or damage. Small scoring or grooves can be removed with a hone or crocus cloth. Complete a visual inspection for indications of wear, pitting and the replacement of parts necessary to prevent early failures.

Bearings

Check bearings for easy action. If bearings have a loose fit or rough action replace the bearing. Wash bearings with a suitable cleaning solvent and permit to air dry. **DO NOT DRY BEARINGS WITH COMPRESSED AIR.**

Needle bearings

Before you press needle bearings in a bore always remove any metal protrusions in the bore or edge of the bore. Before you press bearings into position put petroleum jelly on the inside and outside diameter of the bearings.

Gears

Check all gears for wear and damage. Replace gears that have wear or damage.

Oil seals, O-rings and gaskets

Always install new oil seals, O-rings and gaskets. Put petroleum jelly on seals and O-rings.

Shafts

Check all shafts that have wear or damage. Check the bearing and oil seal surfaces of the shafts for damage.

Service parts

Always install genuine Case service parts. When ordering refer to the Parts Catalog for the correct part number of the genuine Case replacement items. Failures due to the use of other than genuine Case replacement parts are not covered by warranty.

Lubrication

Only use the oils and lubricants specified in the Operator's or Service Manuals. Failures due to the use of non-specified oils and lubricants are not covered by warranty.

SAFETY



This symbol means ATTENTION! BECOME ALERT! YOUR SAFETY IS INVOLVED. The message that follows the symbol contains important information about safety. Carefully read the message. Make sure you fully understand the causes of possible injury or death.

To prevent injury always follow the Warning, Caution and Danger notes in this section and throughout the manual.

Put the warning tag shown below on the key for the keyswitch when servicing or repairing the machine. One warning tag is supplied with each machine. Additional tags Part Number 331-4614 are available from your service parts supplier.



WARNING: Read the operator's manual to familiarize yourself with the correct control functions.



WARNING: Operate the machine and equipment controls from the seat position only. Any other method could result in serious injury.



WARNING: This is a one man machine, no riders allowed.



WARNING: Before starting engine, study Operator's Manual safety messages. Read all safety signs on machine. Clear the area of other persons. Learn and practice safe use of controls before operating.

It is your responsibility to understand and follow manufacturers instructions on machine operation, service and to observe pertinent laws and regulations. Operator's and Service Manuals may be obtained from your Case dealer.



WARNING: If you wear clothing that is too loose or do not use the correct safety equipment for your job, you can be injured. Always wear clothing that will not catch on objects. Extra safety equipment that can be required includes hard hat, safety shoes, ear protection, eye or face protection, heavy gloves and reflector clothing.



WARNING: When working in the area of the fan belt with the engine running, avoid loose clothing if possible, and use extreme caution.



WARNING: When doing checks and tests on the equipment hydraulics, follow the procedures as they are written. DO NOT change the procedure.



WARNING: When putting the hydraulic cylinders on this machine through the necessary cycles to check operation or to remove air from a circuit, make sure all people are out of the way.



WARNING: Use insulated gloves or mittens when working with hot parts.



WARNING: Lower all attachments to the ground or use stands to safely support the attachments before you do any maintenance or service.



WARNING: Pin sized and smaller streams of hydraulic oil under pressure can penetrate the skin and result in serious infection. If hydraulic oil under pressure does penetrate the skin, seek medical treatment immediately. Maintain all hoses and tubes in good condition. Make sure all connections are tight. Make a replacement of any tube or hose that is damaged or thought to be damaged. DO NOT use your hand to check for leaks, use a piece of cardboard or wood.



WARNING: When removing hardened pins such as a pivot pin, or a hardened shaft, use a soft head (brass or bronze) hammer or use a driver made from brass or bronze and a steel head hammer.



WARNING: When using a hammer to remove and install pivot pins or separate parts using compressed air or using a grinder, wear eye protection that completely encloses the eyes (approved goggles or other approved eye protectors).



WARNING: Use suitable floor (service) jacks or chain hoist to raise wheels or tracks off the floor. Always block machine in place with suitable safety stands.



WARNING: When servicing or repairing the machine, keep the shop floor and operator's compartment and steps free of oil, water, grease, tools, etc. Use an oil absorbing material and/or shop cloths as required. Use safe practices at all times.



WARNING: Some components of this machine are very heavy. Use suitable lifting equipment or additional help as instructed in this Service Manual.



WARNING: Engine exhaust fumes can cause death. If it is necessary to start the engine in a closed place, remove the exhaust fumes from the area with an exhaust pipe extension. Open the doors and get outside air into the area.




WARNING: When the battery electrolyte is frozen, the battery can explode if (1), you try to charge the battery, or (2), you try to jump start and run the engine. To prevent the battery electrolyte from freezing, try to keep the battery at full charge. If you do not follow these instructions, you or others in the area can be injured.

STANDARD TORQUE DATA FOR CAP SCREWS AND NUTS

Tightening of cap screws, nuts

Tighten alternately so that tightening torque can be applied evenly. The numbers in the figure below indicate the order of tightening.

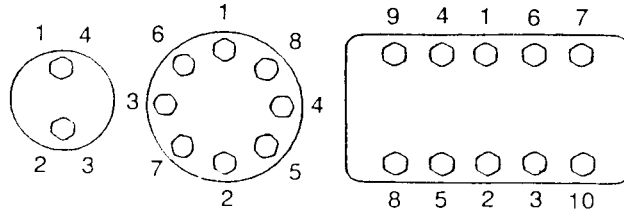

JS00481A

Cap screws which have had Loctite used (white residue remains after removal) should be cleaned with light oil or suitable cleaning solvent and dried. Apply 2-3 drops of Loctite to the thread portion of the cap screw and then tighten.

Torque table

Tighten cap screws and nuts according to the table below if there are no other special instructions.

Cap Screw Name Size (Size)			M6	M8	M10	M12	M14	M16	M18	M20
Cap Screw	Spanner	[mm]	10	13	17	19	22	24	27	30
		[in.]	0.39	0.51	0.67	0.75	0.87	0.95	1.06	1.18
	Tightening torque	[Nm]	6.9	19.6	39.2	58.8	98.1	156.9	196.1	294.2
		[lb-ft]	5.1	14.5	28.9	43.4	72.3	115.7	144.6	217
Socket Head Cap Screw	Spanner	[mm]	5	6	8	10	12	14	14	17
		[in.]	0.20	0.24	0.32	0.39	0.47	0.55	0.55	0.67
	Tightening torque	[Nm]	8.8	21.6	42.1	78.5	117.7	176.5	245.2	343.2
		[lb-ft]	6.5	15.9	31.1	57.9	86.9	130.2	181	253.2

Section 1002

SPECIFICATIONS AND SPECIAL TORQUE SETTINGS

1002

TABLE OF CONTENTS



WARNING: *This symbol is used in this manual to indicate important safety messages. Whenever you see this symbol, carefully read the message which follows. Your safety depends on it.*


TYPE, SERIAL NUMBER AND YEAR OF MANUFACTURE OF THE MACHINE	3
Machine	3
Engine	3
Serial numbers of the components	3
FLUIDS AND LUBRICANTS	4
Hydraulic fluid	4
Transmission component oil	4
Grease	4
Engine Oil	5
Engine fuel, maintenance of fuel filters and fuel storage	6
Anti-freeze/Anti-corrosion.....	8
Environment.....	8
Plastic and resin parts.....	8
SPECIFICATIONS	9
Main data	9
Performance	9
Complete machine dimensions.....	9
Main body dimensions	9
Engine.....	10
Cooling system	10
Capacity of coolant and lubricants	10
Hydraulic oil filter.....	10
Fuel filter	10
Operating devices	11
Hydraulic system.....	12
Swing unit	14
Travel lower body.....	14
Work Unit	15
Digging force (ISO 6015)	15
COMPONENT WEIGHT.....	16
Major component weight.....	16
Other component weight.....	17
SPECIAL TORQUE SETTINGS.....	18
MACHINE OVERALL DIMENSIONS	22

TYPE, SERIAL NUMBER AND YEAR OF MANUFACTURE OF THE MACHINE

For all part orders, request for information or assistance, always specify the type and the serial number of the machine to your Case dealer.

Fill in the following lines with the required information: Type, serial number, year of manufacture of the machine and the serial numbers of the hydraulic and mechanical components.

Machine

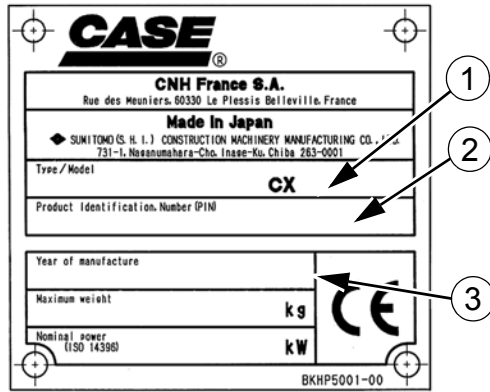

CT04A171A

(1) Type

(2) Serial number

(3) Year of manufacture

Engine

Make and type

Serial number

Serial numbers of the components

Hydraulic pump


Swing reduction gear

Travel reduction gears

Control valve

FLUIDS AND LUBRICANTS

Lubricants must have the correct properties for each application.

 **WARNING:** The conditions of use for individual fluids and lubricants must be respected.

Hydraulic fluid

CASE/AKCELA hydraulic fluid is specially designed for high pressure applications and for the CASE hydraulic system. The type of fluid to be used depends on the ambient temperature.

Temperate climates: -20°C to +40°C (-4° to 104° F)

CASE/AKCELA: HYDRAULIC EXCAVATOR FLUID (MS 1230. ISO VG 46. DIN 51524 PART 2 HV)

Hot climates: 0°C to +50°C (32° to 122° F)

CASE/AKCELA: AW HYDRAULIC FLUID 68 HV (MS 1216. ISO VG 68. DIN 51524 PART 3 CATEGORY HVLP)

Cold climates: -25°C to +20°C (-13° to 68° F)

CASE/AKCELA: AW HYDRAULIC FLUID 32 (MS 1216. ISO VG 32. DIN 51524 PART 2)

Biodegradable fluid: -30°C to +40°C (-22° to 104° F)

This yellow-colored fluid is miscible with standard fluid. If used to change standard fluid, it is advised to drain the circuit completely before refilling with this fluid.

CASE/AKCELA: HYDRAULIC EXCAVATOR FLUID BIO (MS 1230. ISO VG 46. DIN 51524 PART 2 HV)

Transmission component oil

Extreme pressure oil used for enclosed transmission components.

CASE/AKCELA: GEAR 135H EP (SAE 80W-90. API GL 5. MIL-L-2105 D. MS 1316. ZF TE-ML 05A)

Grease

CASE/AKCELA: MOLY GREASE 251H EP-M (251H EP-M. NLGI 2)

"Extreme Pressure" multipurpose grease with lithium soap and molybdenum disulphide.

CASE/AKCELA: MULTIPURPOSE GREASE 251H EP (251H EP. NLGI 2)

"Extreme Pressure" multipurpose grease with lithium soap and calcium.

CASE/AKCELA: PREMIUM GREASE EP2 (NLGI 2)

"Extreme Pressure" multipurpose grease with lithium soap.


Hydraulic breakers

CASE/AKCELA: MULTIPURPOSE GREASE 251H EP (NLGI 2).

Engine Oil


THE CASE/AKCELA No. 1 engine oil is recommended for your engine. This oil ensures proper lubrication of your engine for all operating conditions.

If the CASE/AKCELA Multigrade "No. 1 ENGINE OIL" cannot be obtained, use the oil corresponding to one of the following categories: ACEA E7. API CI-4.

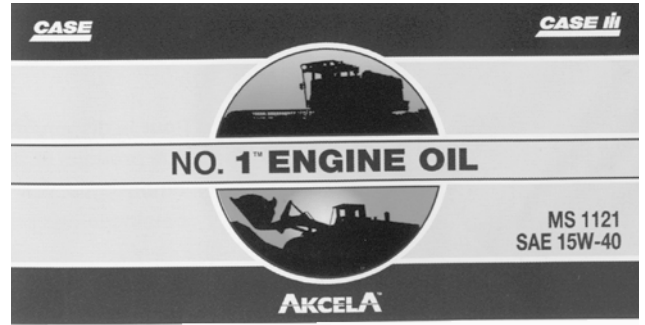

CP02N001

Oil viscosity / Oil range

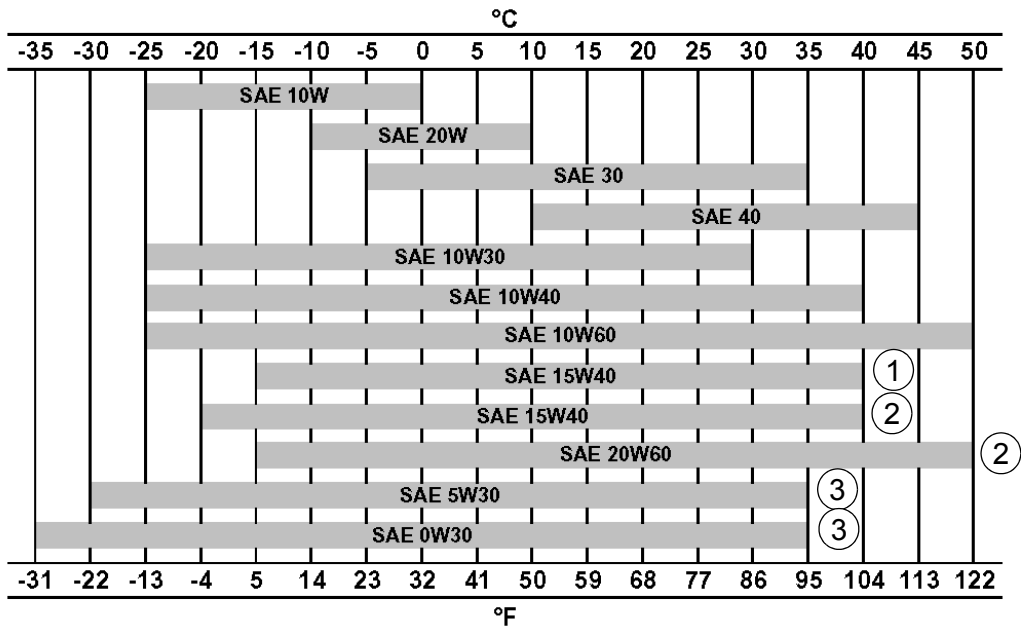

CT02M001

- 1) With mineral base
- 2) With semi-synthetic base
- 3) With synthetic base

Engine fuel, maintenance of fuel filters and fuel storage

In order to meet the emission control regulation of 3rd-stage, the engine components have been made precisely and they are to be used under high-pressure conditions.

Therefore, the specified fuel must be used for the engine.

As a matter of course, not only the guarantee will not be given for the use of a fuel other than the specified but also it may invite a serious breakdown.

In addition, since suitable specifications for the fuel filter elements have been established for this engine, use of the genuine filter is essential.

The following describes the specifications and the requirements of the fuel to be applied, and maintenance of the fuel and the fuel elements.

Fuel to be applied

Selection of fuel

Following conditions must be met for the diesel engines, that is the one;

- 1 In which no dust even fine one is mixed,
- 2 With proper viscosity,
- 3 With high cetane rating,
- 4 With good flow properties in lower temperature,
- 5 With not much sulfur content, and
- 6 With less content of carbon residue

Applicable standards for diesel fuel

Applicable Standard	Recommendation
JIS (Japanese Industrial Standard)	NO.2
DIN (Deutsche Industrie Normen)	DIN 51601
SAE (Society of Automotive Engineers)	
Based on SAE-J-313C	NO. 2-D
BS (British Standard) Based on BS/2869-197	Class A-1
EN590	

If a standard applied to the fuel for the diesel engine is stipulated in your country, check the standard for details.

Requirements for diesel fuel

Although conditions required for the diesel fuel are illustrated above, there are other requirements exerting a big influence on its service durability and service life.

Be sure to observe the following requirements for selecting fuel.

Sulfur content.....	2500 ppm or less
HFRR*.....	460 mm or less
Water content.....	0.05 wt% or less

* HFRR (High-Frequency Reciprocating Rig.): An index showing lubricating properties of the fuel.

Sulfur content reacts to moisture to change into sulfuric acid after combustion.

Use of a fuel containing much sulfur content allows it to accelerate internal corrosion and wear.

In addition, much sulfur content quickens deterioration of engine oil allowing its cleaning dispersive property to be worse which results in acceleration of wear of sliding portions.

HFRR is an index that indicates lubricating property of a fuel.

Large value of the index means poor lubrication so that seizure of the machine components may result if such a fuel is used.

Since a fuel with high HFRR value also has lower viscosity, it can easily be leaked out.

If the fuel is mixed with the engine oil, the oil is diluted to deteriorate its lubricating property resulting in acceleration of wear.

Water content allows inside of the fuel tank to rust which in turn blocking the fuel line and the fuel filter.

IMPORTANT : *In cold weather, fill the fuel tank at the end of the day's work, in order to prevent the formation of condensation.*

This may also cause wear and seizure of the machine components.

If atmospheric temperature goes below the freezing point, moisture content in the fuel forms fine particle of ice allowing the fuel line to be clogged.

IMPORTANT : *Obtain table of analysis for the fuel you are using from the fuel supplier to confirm that it meets the criteria described above.*

IMPORTANT : *If a fuel which does not meet the specifications and the requirements for the diesel engine, function and performance of the engine will not be delivered. In addition, never use such a fuel because a breakdown of the engine or an accident may be invited.*

Guarantee will not be given to a breakdown caused by the use of a improper fuel.

Some fuels are used with engine oil or additives mixed together with diesel engine fuel.

In this case, do not use these fuels because damage to the engine may result as the fuel has been contaminated.

It is natural that the emission control regulation of 3rd-stage will not be cleared in case where a fuel that does not meet the specifications and the requirements is used.

Use the specified fuel for compliance of the exhaust gas control.

IMPORTANT : *If you use diesel fuel which contains much sulfur content more than 2500 ppm, be sure to follow the items below for the engine oil selection and maintenance of engine parts. Guarantee will not be given to breakdowns caused by not to follow these items.*

1 Selection of engine oil

Use API grade CF-4 or JASO grade DH-1.

2 Exchange the engine oil and engine oil filter element by the periodical interval reported on the Operator's Manual.

3 Inspect and exchange the EGR (*)parts and fuel injector parts of engine every 3000 hour of use.

* EGR: Exhaust Gas Recirculation

Maintenance of fuel filters

Be sure to use the genuine fuel filters.

The fuel injection system is precisely constructed and the genuine filter employs finer mesh than conventional filters to improve protection of machine equipment.

If a filter with coarse mesh is used, foreign object passing through the filter enters into the engine so that machine equipment can wear out in a short period of time.

IMPORTANT : *If a fuel filter other than the genuine filter is used, guaranty will not be applied to a fault caused by the use of a wrong filter.*

Two kinds of fuel filter, the pre-filter and the main filter, are mounted on the machine.

Be sure to use the genuine fuel filters and replace them at the periodic intervals reported on the operator's Manual.

IMPORTANT : *Since the pre-filter also has a function of water separation, discharge water and sediment when the float reaches lower part of the filter elements. CHECK EVERY DAY before to start the engine.*

Time to replace filters may be advanced according to properties of the fuel being supplied.

- Therefore, take measures to prevent dust or water from being entered in the fuel tank when supplying fuel.
- When supplying fuel directly from a fuel drum can, leave the drum as it stands for a long period of time to supply clean fuel standing above a precipitate.
- If it is hard to leave the drum for a long period of time, install a fuel strainer and a water separator before the fuel tank of the machine to supply clean fuel.

Water drain cock is provided on the bottom side of the fuel tank.

- Drain water before starting the engine every morning.
- In addition, remove the cover under the tank once a year to clean up inside of the tank.

Fuel storage

Long storage can lead to the accumulation of impurities and condensation in the fuel. Engine trouble can often be traced to the presence of water in the fuel.

The storage tank must be placed outside and the temperature of the fuel should be kept as low as possible. Drain off water and impurities regularly.

Anti-freeze/Anti-corrosion

Use anti-freeze in all seasons to protect the cooling system from corrosion and all risk of freezing.

CASE/AKCELA: PREMIUM ANTI-FREEZE (MS 1710)

For areas where the temperature goes down to -38°C (-36.4°F), mix 50/50 with water.

IMPORTANT : *Do not mix products of a different origin or brand. The same product must be used when topping up the system.*

Environment

Before carrying out any maintenance operation on this machine and before disposing of used fluids or lubricants, always think of the environment. Never throw oil or fluid on the ground and never place it in leaking receptacles.

Contact your local ecological recycling centre or your CASE Dealer to obtain information on the correct method of disposing of these lubricants.

Plastic and resin parts

When cleaning plastic parts, the console, the instrument panel, the indicators etc... avoid using petrol, kerosene, paint solvents etc... Use only water, soap and a soft cloth.

The use of petrol, kerosene, paint solvents etc... causes discoloration, cracks or deformation of these parts.

SPECIFICATIONS

Main data

Model name CX290B Hydraulic Excavator
 Operating weight 29800 kg (65698 lbs)
 Engine output 154 kW / 1800 rpm

Performance

Swing speed 10.2 Tr/min.
 Travel speed Low Speed 3.2 km/h (1.99 mph)
 High Speed 5.6 km/h (3.48 mph)
 Maximum drawbar pull 234.6kN (52740.2 lbf)
 Grade ability 70% (35°)
 Ground pressure 56 kPa (600 mm (23.62 in) grouser shoe)
 49 kPa (700 mm (27.56 in) grouser shoe)
 43 kPa (800 mm (31.50 in) grouser shoe)

Complete machine dimensions

	Arm (dipper)		
	3180 mm (125.20 in)	2650 mm (104.33 in)	3600 mm (141.73 in)
Lenght (without attachment)	5590 mm (220.08 in)	5590 mm (220.08 in)	5590 mm (220.08 in)
Lenght (with attachment)	10450 mm (411.4 in)	10480 mm (412.6 in)	10470 mm (412.2 in)
Height (with attachment)	3260 mm (128.35 in)	3340 mm (131.5 in)	3460 mm (136.22 in)

Main body dimensions

Main body width See machine overall dimensions
 Upper side swing body width 2870 mm (112.99 in)
 Cab width 1000 mm (39.37 in)
 Main body height 3110 mm (122.44 in)
 Engine displacement 3160 mm (124.41 in)
 Swing body tail distance 3150 mm (124.01 in)
 Swing body rear section bottom height 1190 mm (46.85 in)
 Distance between tumblers 3980 mm (156.69 in)
 Overall track length 4850 mm (190.94 in)
 Width of track shoe 600 mm (23.62 in) (Optional: 700 mm (27.56 in), 800 mm (31.50 in))
 Minimum ground clearance 470 mm (18.50 in) (To bottom of lower frame)

Engine

Name	ISUZU, 6HK1X
Type	4-cycle, water-cooled, overhead camshaft, vertical in-line, direct injection type (electronic control), with turbocharger.
No. of cylinders - bore x stroke	6 - Ø115 mm x 125 mm (4.53 x 4.92 in)
Displacement	7.79 L (2.06 gal)
Compression ratio	17.5
Rated output	154 kW / 1800 min ⁻¹
Maximum torque	850 N.m (626.93 lb-ft) / 1500 min ⁻¹
Engine dimensions (LxWxH)	1357x995.4x1141 mm (53.42 x39.19x44.92 in)
Oil pan	All direction 35 rad, inclinable
Oil pan capacity	Maximum: 38 L (10.04 gal) Minimum: 28 L (7.40 gal) (excluding oil filter)
Direction of rotation	Right (as seen from fan)
Starter, reduction type	.24 V, 5 kW
Alternator, AC type	24 V, 50 A
Battery	2 x 12V,128 Ah/5 Hr

Cooling system

Fan type	Ø 850 mm (33.46 in), suction type - 6 blades, plastic with belt mouth-type fan guide
Pulley ratio	0.80 (reduction)
Radiator	
Fin type	wavy
Fin pitch	2.0 mm (0.078 in)
Oil cooler	
Fin type	wavy
Fin pitch	1.75 mm (0.069 in)
Inter-cooler	
Fin type	triangular straight
Fin pitch	2.0 mm (0.078 in)
Fuel cooler	
Fin type	wavy
Fin pitch	2.0 mm (0.078 in)
Coolant capacity	14.5 L (3.83 gal) (engine only)

Capacity of coolant and lubricants

Coolant	29 L (7.66 gal)
Fuel	450 L (118.88 gal)
Lubricant for engine	38 L (10.04 gal)
Lubricant for travel reduction gear (per side)	9.1 L (2.40 gal)
Lubricant for swing reduction gear (per side)	6 L (1.58 gal)
Hydraulic oil	300 L (79.25 gal)
Capacity of hydraulic oil tank	147 L (38.43 gal)

Hydraulic oil filter

Suction filter (inside tank)	150 mesh
Return filter (inside tank)	6 µm
Pilot line filter (inside housing)	8 µm

Fuel filter

Main filter	4 µm
Pre-filter	8 µm

Operating devices

Operator's seat

Location: left side

Structure: Adjustable forward and back and up and down, reclining mechanism, with seat suspension.

Cab

Sealed steel type, all reinforced glass.

Levers and pedals

For travel use: Lever and pedal type (hydraulic pilot type) (x2)

For operating machine use: Lever type (hydraulic pilot type) (x2)

Instruments and switches

Work mode select switch: 3 modes (SP / super power, H / heavy duty, A / automatic)

Travel mode select switch: Low-speed / high-speed switch type

One-touch idle: Knob switch type

Engine emergency stop: Switch type

Monitor device

Machine status display (full-dot liquid crystal)

Work mode selection status: SP / H / A

Instruments (full-dot liquid crystal, except for hour meter)

Fuel gauge: bar graph indicator

Engine coolant temperature gauge: bar graph indicator

Hydraulic oil temperature gauge: bar graph indicator

Hour meter: digital type

Machine Status and Warning Alarms (full-dot liquid crystal and warning tone) *Items have a warning alarm

Over heat*	Battery charge*	Faulty electrical system*
Refill fuel*	Engine oil pressure*	Refill coolant*
Engine preheat	Auto warm-up	Air cleaner clogged
Anti-theft device triggered	Faulty engine system	Engine emergency stop

Lighting

Working light	Tank:	24V, 70W (x1)
	Boom:	24V, 70W (x1)
	Cab:	24V, 70W (x2)
Interior light		24V, 10W (x1)

Horn: electric horn (x2)

Other

Wiper with intermittent function, Window washer, Air conditioner, Rear view mirrors (left and right), DC converter,

Clock

Hydraulic system

Hydraulic pump drive system, directly coupled to the engine (no transmission)

Main pump

Manufacturer	Kawasaki
Pump type	double variable displacement piston pump
Displacement volume	136.7 cm ³ (8.34 cu in) x 2 /rev
Rated operating pressure	34.3 MPa (4975 psi)
Maximum operating pressure	37.3 MPa (5410 psi)
Input revolution speed	1800 min ⁻¹
Maximum discharge flow	246 L/min (64.99 gpm) x 2 / 243 L/min (64.19 gpm) x 2 at 1800 min ⁻¹

Pilot pump

Pump type	Gear pump
Displacement volume	15 cm ³ (0.91 cu in)/rev
Operating pressure	3.92 MPa (568 psi)
Maximum flow	27 L/min (7.13 gpm) (at 1800 min ⁻¹)
Input horsepower	2.8 kW

Control method

- Hydraulic simultaneous constant output control.
- Maximum flow adjustment control through external commands (negative control).
- Setting horsepower adjustment control through external command current.

Control Valve

Model; 4-spool section: integrated (1) or 5-spool section: integrated (1)	
Operation method: hydraulic pilot method: travel, swing and operating machine	
Maximum flow	243 L / min (64.19 gpm)
Main relief set pressure	standard; 34.3 MPa (4975 psi), power boost 37.3 MPa (5410 psi)
Overload set pressure	when boom down; 29.4 ± 0.5 MPa (4264 ± 72.5 psi)
.....	other: 39.2 MPa (5685 psi)
Foot relief set pressure	2.55 MPa (369.85 psi)

Functions

- Straight travel circuit
- Boom up / arm 2 pumps internal flow
- Boom and arm load holding circuit
- Boom-down regenerative circuit
- Bucket-close regenerative circuit
- Arm-in forced regenerative circuit
- Swing priority variable orifice (for arm operation)
- 2 pumps flow
- Variable foot relief

Hydraulic Cylinders

Boom cylinder (x2)

Cylinder bore	Ø140 mm (Ø5.51 in)
Rod diameter	Ø95 mm (Ø3.74 in)
Maximum retracted length	1918 mm (75.51 in)
Stroke	1369 mm (53.90 in)

Arm (dipper) cylinder

Cylinder bore	Ø150 mm (Ø5.90 in)
Rod diameter	Ø105 mm (Ø4.13 in)
Maximum retracted length	2205 mm (86.81 in)
Stroke	1569 mm (61.77 in)

Bucket cylinder

Cylinder bore	Ø135 mm (Ø5.31 in)
Rod diameter	Ø90 mm (Ø3.54 in)
Maximum retracted length	1692 mm (66.61 in)
Stroke	1078 mm (42.44 in)

Rotating Joint

Operating pressure

High pressure passage (ABCD)	34.3 MPa (4975 psi)
Drain port (E).....	1.0 MPa (145 psi)
Pilot port (F).....	3.9 MPa (566 psi)

Flow

High pressure passage (ABCD)	360 L/min (95.10 gpm)
Drain port (E).....	40 L/min (10.57 gpm)
Pilot port (F).....	31 L/min (8.19 gpm)

Torque, when pressurizing 2 ports 196 Nm (145 lb-ft)

Port A; forward right	G1
Port B; forward left	G1
Port C; backward right	G1
Port D; backward left.....	G1
Port E; drain port	G1/2
Port F; pilot port	G1/4

Solenoid Valve

Maximum flow	P -> B: 25 L/min (6.60 gpm) Other: 5 L/min (1.32 gpm)
Rated pressure	4.5 MPa (652.67 psi)

Port size



P, T, B port	G3/8
C1, C2, C3, C4, C5 port	G1/4

Solenoid specifications

Operating voltage	DC 20 to 32 V
Power consumption	17 W max.

Hand control valve


Manufacturer	Kawasaki
Operating pressure	3.92 MPa (569 psi)
Secondary pressure, primary short type	0.64 to 2.45 MPa (92.82 to 355.34 psi)
Operating angle	
Ports 1, 3	19°
Ports 2, 4	25°

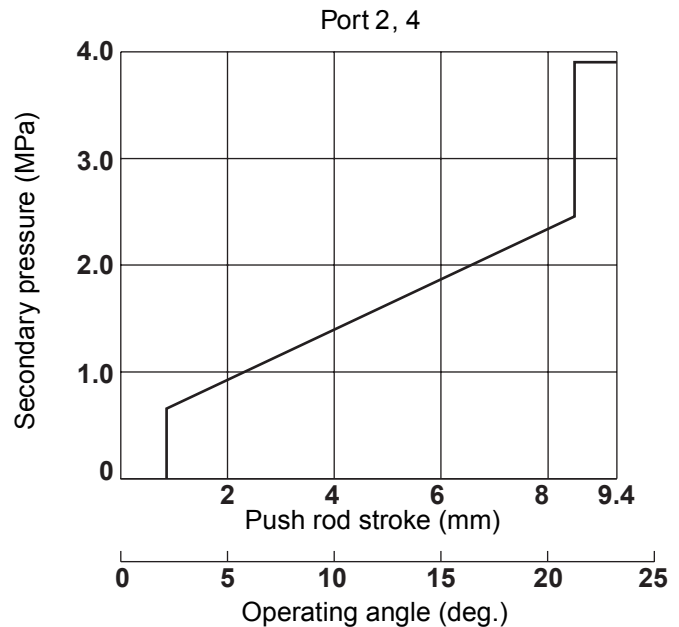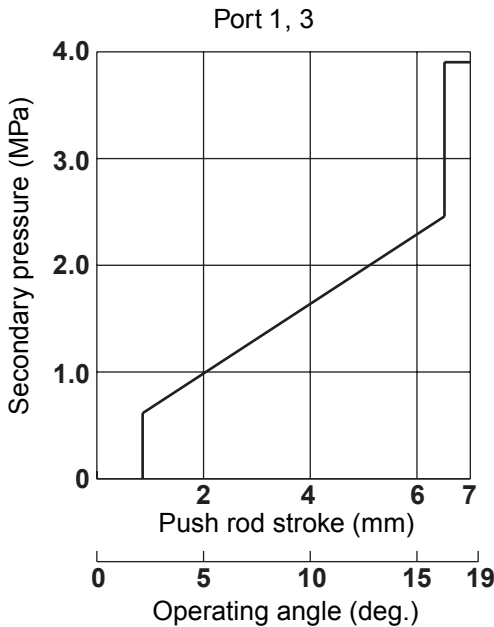

RST-03-01-001B

Foot control valve

Manufacturer	Kawasaki
Operating pressure	3.92 MPa (569 psi)
Secondary pressure, primary short type	0.64 to 2.45 MPa (92.82 to 355.34 psi)
Operating angle	12.4°

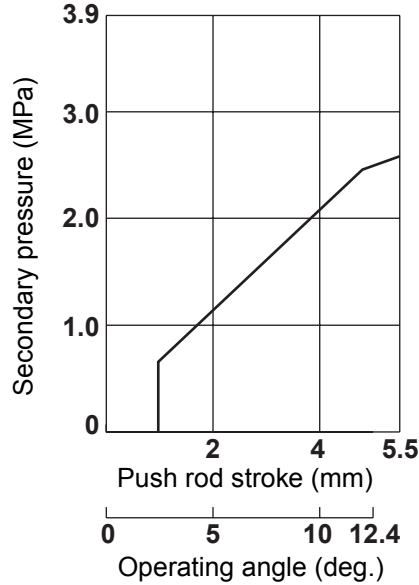

RST-03-01-001D

Swing unit

Swing circle	Swing bearing type (with internal gear)
Swing parking brake	Mechanical lock (operational lever linkage type)
Swing hydraulic motor	Fixed displacement piston motor
Displacement	164.7 cm ³ (10.05 cu in)/rev
Operating pressure	29.4 MPa (4264 psi)
Operating flow	217 L/min(57.32 gpm)
Mechanical brake torque	1013 Nm (747.15 lb-ft) min.
Brake off pressure	3.1 MPa (449.62 psi) max.
Relief valve set pressure	29.3 MPa (4249.61 psi)
Reduction gear	Planetary gear 2-stage reduction gear
Reduction ratio	27.143

Travel lower body

Travel hydraulic motor (x2)	Variable displacement piston motor, automatic 2-speed switch-over with parking brake
Displacement	244.3/141.1 cm ³ (14.91/8.61 cu in)/rev
Operating pressure	34.3 MPa (4975 psi)
Operating flow	243 L/min (64.19 gpm)
Brake torque	36 KNm (26552.2 lb-ft) min. (including reduction gear)
Relief valve set pressure	36.2 to 39.7 MPa (5250.37 to 5758 psi)
automatic 2-speed switch-over pressure	26.5 MPa (3843.5 psi)
Reduction gear	Planetary gear 2-stage reduction gear
Reduction ratio	39.875
Travel brake	Hydraulic lock
Parking brake	Mechanical lock (travel lever linkage type)
Track shoe	
Model	Assembly type triple grouser shoe
Number of shoes (per side)	50
Shoe width	
standard	600 mm (23.62 in)
optional	700 mm (27.56 in), 800 mm (31.50 in)
Grouser height	26 mm (1.02 in)
Link pitch	203 mm (7.99 in)

Roller

Number of upper rollers (per side)	2
Number of lower rollers (per side)	9
Track belt tension adjuster	Grease cylinder type (with cushion spring)
Mounting length of spring	774 mm (30.47 in)

Work Unit

Model Backhoe attachment
 Components / dimensions / working dimensions

	Standard boom		
	Standard arm	Short arm	Long arm
Arm (dipper) length	3180 mm 125.20 in	2650 mm 104.33 in	3600 mm 141.73 in
Boom length (Standard boom spec.)	6150 mm 242.12 in		
Bucket radius	1571.2 mm 61.86 in		
Bucket wrist angle	176°		
Maximum digging radius	10670 mm 420.08 in	10220 mm 402.36 in	11160 mm 439.67 in
Maximum digging radius at ground line	10500 mm 413.38 in	10040 mm 395.27 in	10990 mm 432.68 in
Maximum digging depth	7100 mm 279.53 in	6570 mm 258.66 in	7580 mm 298.42 in
Maximum vertical straight wall digging depth	6120 mm 240.94 in	5760 mm 226.77 in	6720 mm 264.57 in
Maximum digging height	10060 mm 396.06 in	9930 mm 390.94 in	10390 mm 409.05 in
Maximum dump height	7090 mm 279.13 in	6940 mm 273.23 in	7390 mm 290.94 in
Minimum swing radius at front	3920 mm 154.33 in	4000 mm 157.48 in	4000 mm 157.48 in
Height for minimum swing radius at front	8190 mm 322.44 in	8220 mm 323.62 in	8170 mm 321.65 in

Digging force (ISO 6015)

	Arm (dipper)		
	3.18 m (125.20 in)	2.65 m (104.33 in)	3.60 m (141.73 in)
Arm (dipper) digging force (standard)	121.6 kN (27336.8 lbf)	140.2 kN (35518.2 lbf)	109.8 kN (24684 lbf)
Arm (dipper) digging force (power up)	132.4 kN (29764.7 lbf)	153.0 kN (34395.8 lbf)	118.7 kN (26684.8 lbf)
Bucket digging force (standard)	174.6 kN (39251.6 lbf)	174.6 kN (39251.6 lbf)	174.6 kN (39251.6 lbf)
Bucket digging force (power up)	190.2 kN (42758.7 lbf)	190.2 kN (42758.7 lbf)	190.2 kN (42758.7 lbf)

BUY NOW

**Then Instant Download
the Complete Manual
Thank you very much!**