

JOHN DEERE
WORLDWIDE COMMERCIAL & CONSUMER
EQUIPMENT DIVISION

ProGator®
2030 Utility Vehicle

TM1944 NOV02

TECHNICAL MANUAL



JOHN DEERE

Export Version
Litho in U.S.A.

INTRODUCTION

Manual Description

This technical manual is written for an experienced technician and contains sections that are specifically for this product. It is a part of a total product support program.

The manual is organized so that all the information on a particular system is kept together. The order of grouping is as follows:

- Table of Contents
- Specifications and Information
- Identification Numbers
- Tools and Materials
- Component Location
- Schematics and Harnesses
- Theory of Operation
- Operation and Diagnostics
- Diagnostics
- Tests and Adjustments
- Repair
- Other

NOTE: Depending on the particular section or system being covered, not all of the above groups may be used.

The bleed tabs for the pages of each section will align with the sections listed on this page. Page numbering is consecutive from the beginning of the Safety section through the last section.

We appreciate your input on this manual. If you find any errors or want to comment on the layout of the manual please contact us.

Safety

Specifications and Information

Diesel Engine

Electrical

Power Train

Hydraulics

Steering

Brakes

Miscellaneous

SAFETY

Recognize Safety Information



MIF

This is the safety-alert symbol. When you see this symbol on your machine or in this manual, be alert to the potential for personal injury.


Follow recommended precautions and safe servicing practices.

Understand Signal Words

A signal word - DANGER, WARNING, or CAUTION - is used with the safety-alert symbol. DANGER identifies the most serious hazards.

DANGER or WARNING safety signs are located near specific hazards. General precautions are listed on CAUTION safety signs. CAUTION also calls attention to safety messages in this manual.

Replace Safety Signs

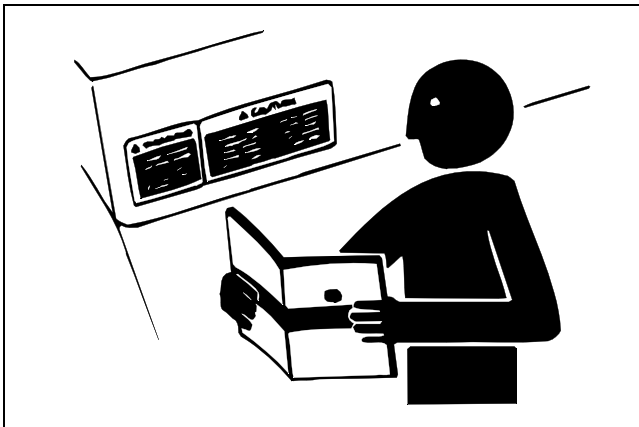


MIF

Replace missing or damaged safety signs. See the machine operator's manual for correct safety sign placement.

Handle Fluids Safely - Avoid Fires

Be Prepared for Emergencies

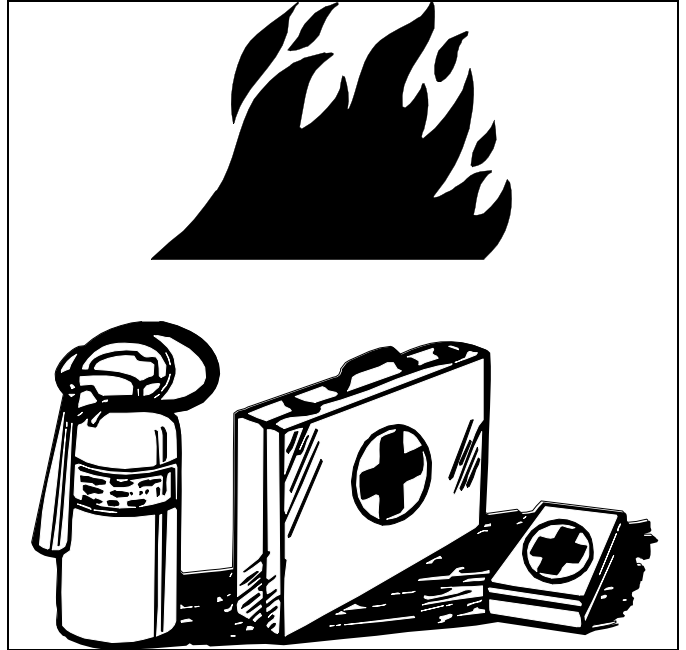

MIF

When you work around fuel, do not smoke or work near heaters or other fire hazards.

Store flammable fluids away from fire hazards. Do not incinerate or puncture pressurized containers.

Make sure machine is clean of trash, grease, and debris.

Do not store oily rags; they can ignite and burn spontaneously.


Be prepared if a fire starts.

Keep a first aid kit and fire extinguisher handy.

Keep emergency numbers for doctors, ambulance service, hospital, and fire department near your telephone.

SAFETY

Use Care in Handling and Servicing Batteries

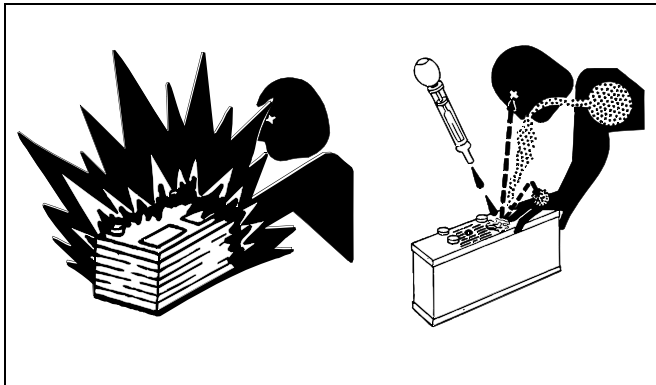

MIF

Prevent Battery Explosions

- Keep sparks, lighted matches, and open flame away from the top of battery. Battery gas can explode.
- Never check battery charge by placing a metal object across the posts. Use a volt-meter or hydrometer.
- Do not charge a frozen battery; it may explode. Warm battery to 16°C (60°F).

Prevent Acid Burns

- Sulfuric acid in battery electrolyte is poisonous. It is strong enough to burn skin, eat holes in clothing, and cause blindness if splashed into eyes.

Avoid acid burns by:

1. Filling batteries in a well-ventilated area.
2. Wearing eye protection and rubber gloves.
3. Avoiding breathing fumes when electrolyte is added.
4. Avoiding spilling or dripping electrolyte.
5. Use proper jump start procedure.

If you spill acid on yourself:

1. Flush your skin with water.
2. Apply baking soda or lime to help neutralize the acid.
3. Flush your eyes with water for 10-15 minutes.
4. Get medical attention immediately.

If acid is swallowed:

1. Drink large amounts of water or milk.
2. Then drink milk of magnesia, beaten eggs, or vegetable oil.
3. Get medical attention immediately.

Use Care Around High-Pressure Fluid Lines

Avoid High-Pressure Fluids



MIF

Escaping fluid under pressure can penetrate the skin causing serious injury.

Avoid injury from escaping fluid under pressure by stopping the engine and relieving pressure in the system before disconnecting or connecting hydraulic or other lines. Tighten all connections before applying pressure.

Search for leaks with a piece of cardboard. Protect hands and body from high pressure fluids.

If an accident occurs, see a doctor immediately. Any fluid injected into the skin must be surgically removed within a few hours or gangrene may result. Doctors unfamiliar with this type of injury should reference a knowledgeable medical source. Such information is available from Deere & Company Medical Department in Moline, Illinois, U.S.A.

Avoid Heating Near Pressurized Fluid Lines




MIF

Flammable spray can be generated by heating near pressurized fluid lines, resulting in severe burns to yourself and bystanders. Do not heat by welding, soldering, or using a torch near pressurized fluid lines or other flammable materials. Pressurized lines can be accidentally cut when heat goes beyond the immediate flame area.

SAFETY

Use Safe Service Procedures

Wear Protective Clothing

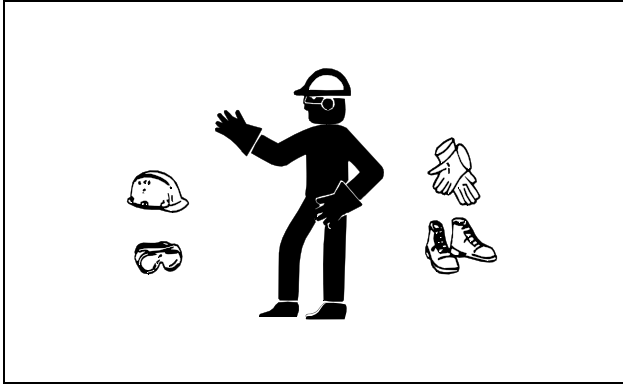


MIF

Wear close fitting clothing and safety equipment appropriate to the job.

Prolonged exposure to loud noise can cause impairment or loss of hearing. Wear a suitable hearing protective device such as earmuffs or earplugs to protect against objectionable or uncomfortable loud noises.

Operating equipment safely requires the full attention of the operator. Do not wear radio or music headphones while operating machine.

Service Machines Safely

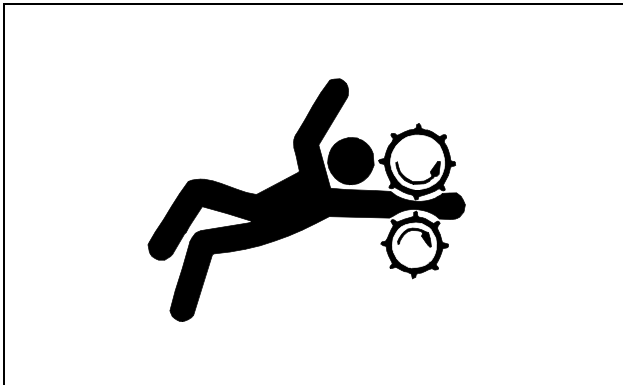

MIF


Tie long hair behind your head. Do not wear a necktie, scarf, loose clothing, or necklace when you work near machine tools or moving parts. If these items were to get caught, severe injury could result.

Remove rings and other jewelry to prevent electrical shorts and entanglement in moving parts.

Use Proper Tools

Use tools appropriate to the work. Makeshift tools and procedures can create safety hazards. Use power tools only to loosen threaded parts and fasteners. For loosening and tightening hardware, use the correct size tools. **DO NOT** use U.S. measurement tools on metric fasteners. Avoid bodily injury caused by slipping wrenches. Use only service parts meeting John Deere specifications.

Park Machine Safely

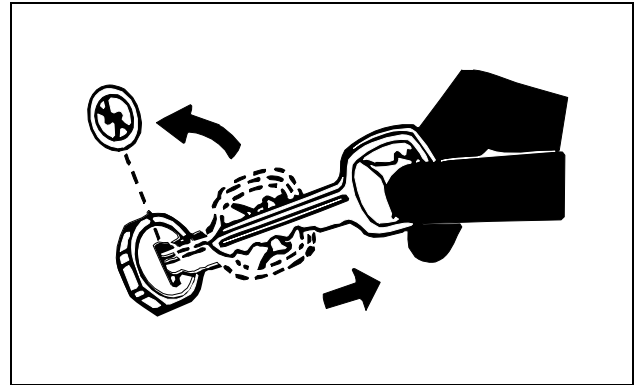


MIF

Before working on the machine:

1. Lower all equipment to the ground.
2. Stop the engine and remove the key.
3. Disconnect the battery ground strap.
4. Hang a "DO NOT OPERATE" tag in operator station.

SAFETY

Support Machine Properly and Use Proper Lifting Equipment

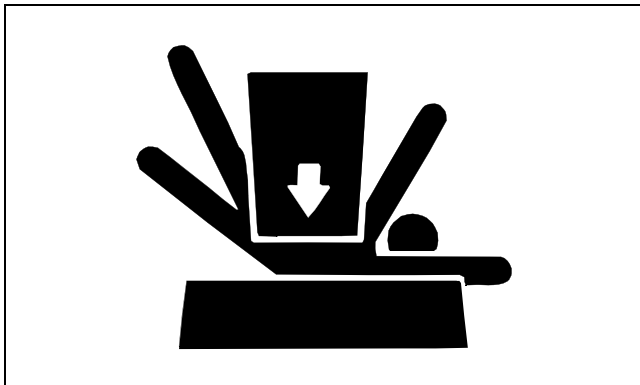

MIF

If you must work on a lifted machine or attachment, securely support the machine or attachment.

Do not support the machine on cinder blocks, hollow tiles, or props that may crumble under continuous load. Do not work under a machine that is supported solely by a jack. Follow recommended procedures in this manual.

Lifting heavy components incorrectly can cause severe injury or machine damage. Follow recommended procedure for removal and installation of components in the manual.

Work in Clean Area

Before starting a job:

1. Clean work area and machine.
2. Make sure you have all necessary tools to do your job.
3. Have the right parts on hand.
4. Read all instructions thoroughly; do not attempt shortcuts.


Using High Pressure Washers

Directing pressurized water at electronic/electrical components or connectors, bearings, hydraulic seals, fuel injection pumps or other sensitive parts and components may cause product malfunctions. Reduce pressure and spray at a 45 to 90 degree angle.

Illuminate Work Area Safely

Illuminate your work area adequately but safely. Use a portable safety light for working inside or under the machine. Make sure the bulb is enclosed by a wire cage. The hot filament of an accidentally broken bulb can ignite spilled fuel or oil.

Work in Ventilated Area

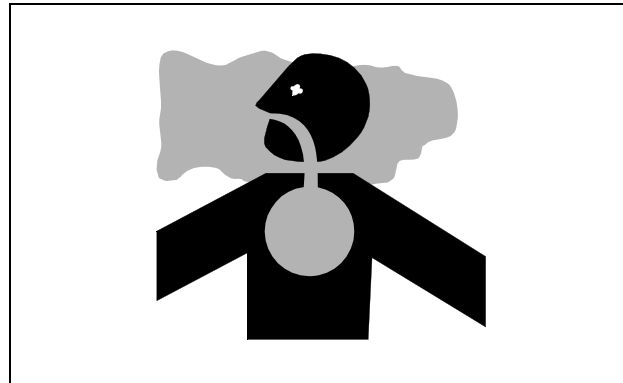

MIF

Engine exhaust fumes can cause sickness or death. If it is necessary to run an engine in an enclosed area, remove the exhaust fumes from the area with an exhaust pipe extension.

If you do not have an exhaust pipe extension, open the doors and get outside air into the area.

WARNING: California Proposition 65 Warning

Diesel engine exhaust and some of its constituents are known to the State of California to cause cancer, birth defects, and other reproductive harm.

Gasoline engine exhaust from this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

Remove Paint before Welding or Heating

Avoid potentially toxic fumes and dust. Hazardous fumes can be generated when paint is heated by welding, soldering, or using a torch. Do all work outside or in a well ventilated area. Dispose of paint and solvent properly. Remove paint before welding or heating: If you sand or grind paint, avoid breathing the dust. Wear an approved respirator. If you use solvent or paint stripper, remove stripper with soap and water before welding. Remove solvent or paint stripper containers and other flammable material from area. Allow fumes to disperse at least 15 minutes before welding or heating.

SAFETY


Avoid Harmful Asbestos Dust

Avoid breathing dust that may be generated when handling components containing asbestos fibers. Inhaled asbestos fibers may cause lung cancer.

Components in products that may contain asbestos fibers are brake pads, brake band and lining assemblies, clutch plates, and some gaskets. The asbestos used in these components is usually found in a resin or sealed in some way. Normal handling is not hazardous as long as airborne dust containing asbestos is not generated.

Avoid creating dust. Never use compressed air for cleaning. Avoid brushing or grinding material containing asbestos. When servicing, wear an approved respirator. A special vacuum cleaner is recommended to clean asbestos. If not available, apply a mist of oil or water on the material containing asbestos. Keep bystanders away from the area.

Service Tires Safely

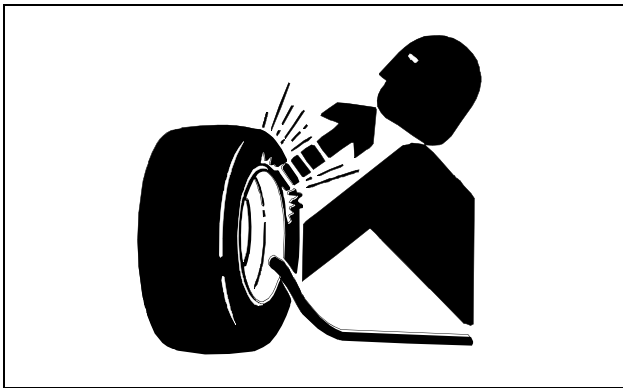

MIF


Explosive separation of a tire and rim parts can cause serious injury or death.

Do not attempt to mount a tire unless you have the proper equipment and experience to perform the job. Always maintain the correct tire pressure. Do not inflate the tires above the recommended pressure. Never weld or heat a wheel and tire assembly. The heat can cause an increase in air pressure resulting in a tire explosion. Welding can structurally weaken or deform the wheel.

When inflating tires, use a clip-on chuck and extension hose long enough to allow you to stand to one side and NOT in front of or over the tire assembly. Use a safety cage if available.

Check wheels for low pressure, cuts, bubbles, damaged rims or missing lug bolts and nuts.


Avoid Injury from Rotating Blades, Augers, and PTO Shafts

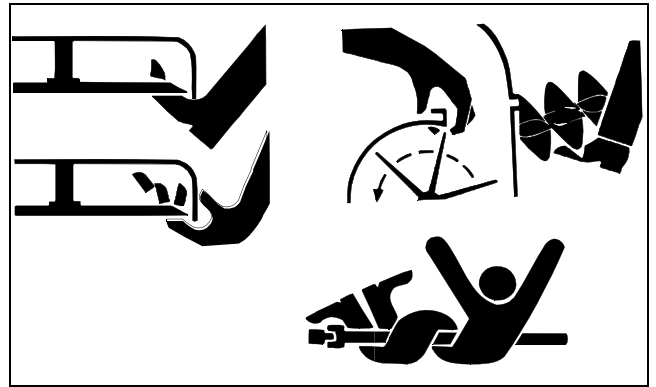

MIF

Keep hands and feet away while machine is running. Shut off power to service, lubricate or remove mower blades, augers or PTO shafts.

Handle Chemical Products Safely

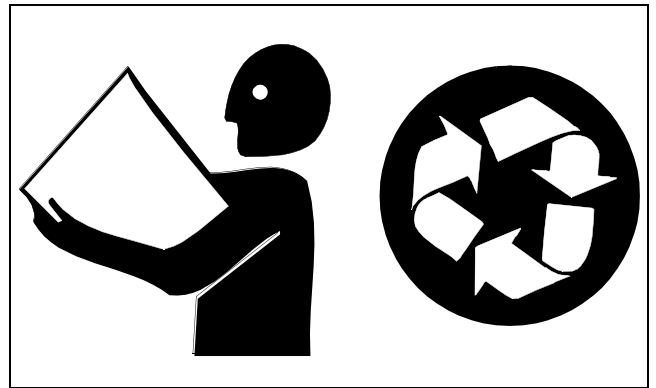

MIF

Direct exposure to hazardous chemicals can cause serious injury. Potentially hazardous chemicals used with John Deere equipment include such items as lubricants, coolants, paints, and adhesives.


A Material Safety Data Sheet (MSDS) provides specific details on chemical products: physical and health hazards, safety procedures, and emergency response techniques. Check the MSDS before you start any job using a hazardous chemical. That way you will know exactly what the risks are and how to do the job safely. Then follow procedures and recommended equipment.

SAFETY

Dispose of Waste Properly

Improperly disposing of waste can threaten the environment and ecology. Potentially harmful waste used with John Deere equipment include such items as oil, fuel, coolant, brake fluid, filters, and batteries. Use leakproof containers when draining fluids. Do not use food or beverage containers that may mislead someone into drinking from them. Do not pour waste onto the ground, down a drain, or into any water source. Inquire on the proper way to recycle or dispose of waste from your local environmental or recycling center, or from your John Deere dealer.

Service Cooling System Safely

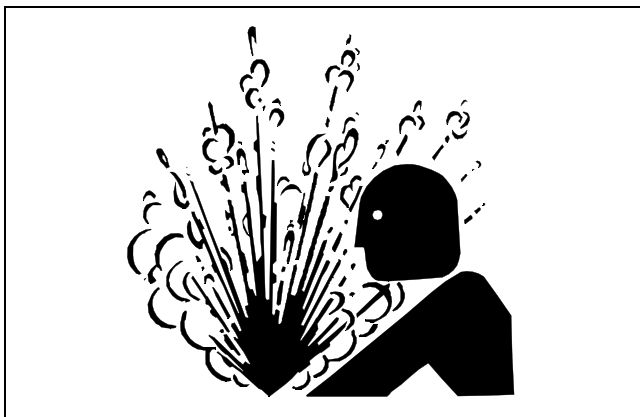

MIF

Explosive release of fluids from pressurized cooling system can cause serious burns.

Shut off machine. Only remove filler cap when cool enough to touch with bare hands. Slowly loosen cap to first stop to relieve pressure before removing completely.

Live with Safety



MIF

Before returning machine to customer, make sure machine is functioning properly, especially the safety systems. Install all guards and shields.

SPECIFICATIONS TABLE OF CONTENTS

Table of Contents

General Vehicle Specifications	13
Engine - Diesel	13
Electrical	13
Fuel System	13
Drive Train	14
Hydraulic System	14
Tires	14
Dimensions	14
Inch Fastener Torque Values	15
Metric Fastener Torque Values	16
Face Seal Fittings with Inch Stud Ends Torque	17
Face Seal Fittings with Metric Stud Ends Torque	18
O-Ring Face Seal Fittings	19
O-Ring Boss Fittings	19
Diesel Fuel	20
Diesel Fuel Lubricity	20
Diesel Fuel Storage	20
Lubricants	21
Engine Oil	21
Break-In Diesel Engine Oil	21
Transmission and Hydraulic Oil	22
Chassis Grease	22
Alternative Lubricants	23
Synthetic Lubricants	23
Lubricant Storage	23
Mixing of Lubricants	23
Oil Filters	23
Coolants	24
Coolant	24
Coolant Drain Intervals	24
Identification Numbers	25

SPECIFICATIONS GENERAL VEHICLE SPECIFICATIONS

General Vehicle Specifications

Engine - Diesel

Make	Yanmar
Model (ProGator S.N. [-100030])	3TNE74C-JUV
Model (ProGator S.N. [100031-])	3TNE74C-EJUV
Type	4-cycle diesel
Bore	74 mm (72.91 in.)
Stroke	78 mm (3.07 in.)
Cylinders	3
Valves	Overhead
Displacement	1006 cm ³ (61.4 cu in.)
Gross Output Power	17.1 kW (22.9 hp)
Maximum Torque	61.7 N•m (45.5 lb-ft) @ 2400 rpm
Lubrication	Full pressure
Oil Filter	Spin on (standard)
Engine Rated Speed	3600 rpm
Engine Slow Idle	1450±50 rpm
Engine Fast Idle	3450±50 rpm
Cooling System	Liquid with pump and radiator
Air Cleaner	Dry replaceable dual element with safety element

1. Specifications and design subject to change without notice.

Electrical

Volts	12 VDC
Battery Rating (CCA @ 0°F)	47 amp-hr (500 amp)
Alternator	55 amps
Regulator	External, current limiting
Starting Motor	1.1 kW
Headlights	37.5 W halogen bulb
Instrument Panel Lights	1.7 W bayonet base

Fuel System

Diesel Engine:

System Type	Indirect fuel injection
Injection Pump	In-line with electric shutoff
Fuel Type	Diesel
Fuel Tank Capacity	30.3 L (8 gal)
Fuel Filter	Glass bowl with disposable paper element
Fuel Pump	Electric

SPECIFICATIONS GENERAL VEHICLE SPECIFICATIONS

Drive Train

Type	Synchromesh gear
Differential Lock	Standard, hand operated
Mechanical Front Wheel Drive (MFWD)	Bi-directional overrunning clutch
Number of Speeds	5 forward, 1 reverse
Steering	Hydraulic power assist
Clutch Type	Dry, single disk

Hydraulic System

Lift/Lower System (Auxiliary)

Type	Open system
Working Pressure	17000 kPa (2466 psi)
Pump Capacity	28.9 liters/min (7.6 gpm)
Pump Flow (Diesel Engine @ 3450 RPM)	27.1 liters/min (7.2 gpm)

Steering System

Type	Open system
Working Pressure	7500 kPa (1088 psi)
Pump Capacity	13.3 liters/min (3.5 gpm)
Pump Flow (Diesel Engine @ 3450 RPM)	12.5 liters/min (3.3 gpm)
System Capacity	11.4 L (3.0 gal)

Relief Valve Pressure Settings

Steering Cylinder Unit	7000-7500 kPa (1015-1088 psi)
Lift / Lower and Auxiliary PTO Control Valve	16553-17243 kPa (2400-2500 psi)

Tires

Front Tires	Industrial Trax 23X10.50-12
Rear Tires	Multi Trac 26X12.00-12
Rear Tires (Optional)	Multi Trac 26X14.00-12
Tire Pressure (All)	69-97 kPa (10-14 psi)

Dimensions

Ground Clearance	16.8 cm (6.6 in.)
Wheelbase (Front to Rear Axle)	167.6 cm (66 in.)
Wheel Tread, Front	123.2 cm (48.5 in.)
Wheel Tread, Rear	129 cm (50.8 in.)
Overall Length with Optional Cargo Box	328.4 cm (129.3 in.)
Overall Length without Optional Cargo Box	319.3 cm (125.7 in.)
Overall Width	158.5 cm (62.4 in.)
Overall Height	193.7 cm (76.3 in.)

BUY NOW

**Then Instant Download
the Complete Manual
Thank you very much!**